

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE BLANK (USPTO)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 March 2001 (08.03.2001)

PCT

(10) International Publication Number
WO 01/16900 A2

(51) International Patent Classification⁷: **G07F 7/10**

(21) International Application Number: **PCT/US00/23817**

(22) International Filing Date: **30 August 2000 (30.08.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:

60/151,880	31 August 1999 (31.08.1999)	US
60/164,668	9 November 1999 (09.11.1999)	US
60/165,577	15 November 1999 (15.11.1999)	US
60/201,635	3 May 2000 (03.05.2000)	US

(71) Applicant: **AMERICAN EXPRESS TRAVEL RELATED SERVICES COMPANY, INC.** [US/US]; American Express Tower, World Financial Center, New York City, NY 10285-4900 (US).

(72) Inventors: **BENNETT, Russell**; 10877 East Pear Tree Drive, Cornville, AZ 86325 (US). **BISHOP, Fred**; 2811


West Dynamite Boulevard, Phoenix, AZ 85085 (US). **GLAZER, Elliot**; 14107 Chiasso Terrace, Chesterfield, VA 23838 (US). **GORGOL, Zyg**; 10786 East Terra Drive, Scottsdale, AZ 85258 (US). **HOHLE, William, G.**; 10882 West Cedarfort Road (8570 North), Lehi, UT 84043 (US). **JOHNSTONE, David**; 28618 North 60th Place, Cave Creek, AZ 85331 (US). **LAKE, Walter, D.**; 719 West Rawhide Avenue, Gilbert, AZ 85233 (US). **SIMKIN, Marvin**; - (US). **SWIFT, Nick**; 38 Water Road, Reading, Greater London RG30 2NN (GB). **WHITE, Dirk**; 6638 West Via Montoya, Glendale, AZ 85310 (US). **JOHNSON, Michael**; 9154 North 97th Avenue, Peoria, AZ 85345 (US). **ROYER, Coby**; 7833 Stanford Avenue, University City, MO 63130 (US).

(74) Agent: **SOBELMAN, Howard, I.**; Snell & Wilmer L.L.P., One Arizona Center, 400 East Van Buren, Phoenix, AZ 85004-2202 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,

[Continued on next page]

(54) Title: **METHODS AND APPARATUS FOR CONDUCTING ELECTRONIC TRANSACTIONS**

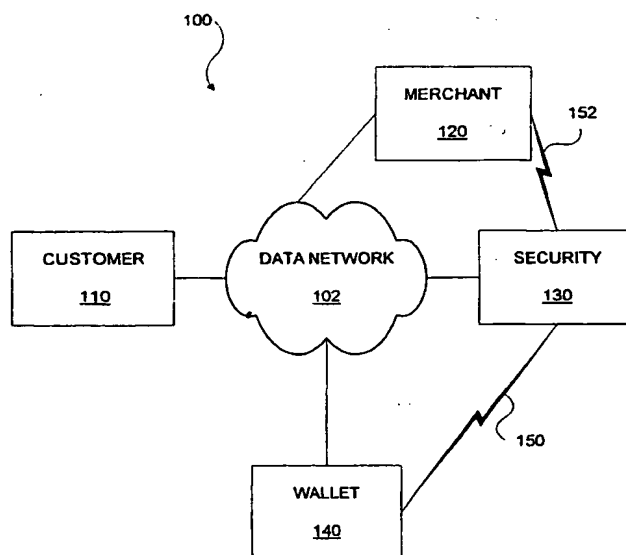

(57) Abstract: A system and method for conducting electronic commerce are disclosed. In various embodiments, the electronic transaction is a purchase transaction. A user (110) is provided with an intelligent token (202), such as a smartcard containing a digital certificate. The intelligent token suitably authenticates with a server on a network (130) that conducts all or portions of the transaction on behalf of the user. In various embodiments a wallet server (140) interacts with a security server (130) to provide enhanced reliability and confidence in the transaction. In various embodiments, the wallet server includes a toolbar (502). In various embodiments, the digital wallet pre-fills forms. Forms may be pre-filled using an auto-remember component.

WO 01/16900 A2



NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

Published:

— Without international search report and to be republished
upon receipt of that report.

(84) **Designated States (regional):** ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

METHODS AND APPARATUS FOR CONDUCTING ELECTRONIC TRANSACTIONS

FIELD OF THE INVENTION

The invention relates generally to methods and apparatus for conducting
5 network transactions. More particularly, the invention relates to systems for
authenticating and conducting business over data networks such as the Internet.

BACKGROUND OF THE INVENTION

In recent years, many consumers have discovered the convenience and
10 economy of purchasing goods and services electronically. A number of channels for
electronic purchases (commonly called "e-purchases") are available, including shop-at-
home television networks, call-in responses to television advertisements, and the like.
Most recently, direct purchasing via the Internet has become extremely popular.

In a typical Internet transaction, a consumer generally identifies goods and/or
15 services for purchase by viewing an online advertisement such as a hypertext markup
language (HTML) document provided via a World Wide Web (WWW) browser.
Payment typically occurs via a charge card number that is provided via a secure
channel such as a secure sockets layer (SSL) connection that is established between
the consumer and the merchant. A charge card account number is typically a sixteen-
20 digit credit card number. Credit card numbers typically comply with a standardized
format having four spaced sets of numbers, as represented by the number "0000 0000
0000 0000". The first five to seven digits are reserved for processing purposes and
identify the issuing bank, card type, etc. The last sixteenth digit is used as a sum
check for the sixteen-digit number. The intermediary eight-to-ten digits are used to
25 uniquely identify the customer. The merchant then processes the charge card number
by, for example, receiving direct authorization from the card issuer, then the merchant
completes the transaction. The SSL standard is described by, for example, "The SSL
Protocol Version 3.0" dated November 18, 1996 which is available online at
<http://home.netscape.com/eng/ssl3/draft302.txt>, the entire contents of which are
30 incorporated herein by reference.

Although millions of transactions take place every day via the Internet,
conventional SSL transactions often exhibit a number of marked disadvantages.
Although SSL typically provides a secure end-to-end connection that prevents
unscrupulous third parties from eavesdropping (e.g., "sniffing") or otherwise obtaining a

purchaser's charge card number, the protocol does not provide any means for ensuring that the charge card number itself is valid, or that the person providing the card number is legally authorized to do so. Because of the high incidence of fraud in Internet transactions, most charge card issuers consider network transactions to be "Card Not Present" transactions subject to a higher discount rate. Stated another way, because of the increased risk from "Card Not Present" transactions, most charge card issuers charge the merchant a higher rate for accepting card numbers via electronic means than would be charged if the card were physically presented to the merchant.

To improve the security deficiencies inherent in transporting charge card numbers over unsecure networks, many have suggested the use of "smart cards". Smart cards typically include an integrated circuit chip having a microprocessor and memory for storing data directly on the card. The data can correspond to a cryptographic key, for example, or to an electronic purse that maintains an electronic value of currency. Many smartcard schemes have been suggested in the prior art, but these typically exhibit a marked disadvantage in that they are non-standard. In other words, merchants typically must obtain new, proprietary software for their Web storefronts to accept smartcard transactions. Moreover, the administration costs involved with assigning and maintaining the cryptographic information associated with smart cards have been excessive to date.

The Secure Electronic Transaction (SET) standard has been suggested to improve the security of Internet transactions through the use of various cryptographic techniques. Although SET does provide improved security over standard SSL transactions, the administration involved with the various public and private keys required to conduct transactions has limited SET's widespread acceptance. SET also requires special software for those merchants wishing to support SET transactions.

Existing digital wallet technology, such as the digital wallet technology provided by, for example, GlobeSet, Inc., 1250 Capital of Texas Highway South, Building One, Suite 300, Austin, TX, 78746, provides a means for customers to utilize transaction card products (e.g., credit, charge, debit, smart cards, account numbers and the like) to pay for products and services on-line. In general, digital wallets are tools which store personal information (name, address, chargecard number, credit card number, etc.) in order to facilitate electronic commerce or other network interactions. The personal information can be stored on a general server or at a client location (PC or Smartcard) or on a hybrid of both a general server and a client server. The digital wallet general

server is comprised of a Web server and a database server which centrally houses the customer's personal and credit card information, shopping preferences and profiles of on-line merchants.

5 A digital wallet preferably performs functions such as single sign on/one password, automatic form filling of check out pages, one- or two-click purchasing, personalization of Websites, on-line order and delivery tracking, itemized electronic receipts, and customized offers and promotions based upon spending patterns and opt-ins. More particularly, a one-click purchase activates the wallet and confirms the purchase at the same time. A two-click check out first activates the wallet, then the
10 second click confirms the purchase.

In use, the wallet bookmark is typically clicked by the customer and an SSL session is established with the Wallet server. A browser plug-in is executed and the customer supplies an ID/password or smartcard for authentication in order to gain access to the wallet data. When shopping at an on-line merchant, the appropriate
15 wallet data is transferred from the wallet server to the merchant's Web server.

A new system of conducting electronic transactions is therefore desired. Such a system should provide improved security without additional overhead for customers and merchants. Moreover, such a new system should integrate well with various Internet wallets and other services provided by various vendors.
20

SUMMARY OF THE INVENTION

In exemplary embodiments of the invention, a user is provided with an intelligent token, such as a smartcard, which can be used in conducting electronic transactions. The intelligent token contains a digital certificate and suitably authenticates with a
25 server on the network that conducts all or portions of the transaction on behalf of the user. The user is a purchaser conducting a purchase transaction and the server is a wallet server that interacts with a security server to provide enhanced reliability and confidence in the transaction.

Electronic transactions, such as purchase transactions, are conducted by:
30 receiving a transaction request from a user at a server; issuing a challenge to the user; receiving a response from the user based upon the challenge; processing the response to verify a transaction instrument; assembling credentials which include at least one key for the electronic transaction; providing at least a portion of the credentials to the user; receiving a second request from the user which includes the

portion of the credentials; and validating the portion of the credentials with the key to provide access to a transaction service.

Moreover, the present invention protects a network server from an attack by: restricting access to the network server to a portion of the network server for at least
5 selected protocol and scanning the portion of the network server for particular characters associated with the selected protocol. The particular characters may be removed or replaced with benign characters in order to reduce the security risk posed by the selected protocol. Preferably, the characters can be logged in order to form a security log. The security log can be reviewed to determine whether the particular
10 characters are hostile. Alternatively, a request may be denied.

The present invention also includes a transaction tool, such as a digital wallet used to perform purchase transactions, having an activator and a toolbar. Preferably, the toolbar allows a user to perform a small download of the activator and the toolbar utilizes one or more operating system controls, for example, a system tray icon. The
15 transaction tool also includes a form fill component and an auto remember component for pre-filling forms with information previously provided by the user.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other features and advantages of the present invention are
20 hereinafter described in the following detailed description of exemplary embodiments to be read in conjunction with the accompanying drawing figures, wherein like reference numerals are used to identify the same or similar parts in the similar views, and:

Figures 1A-1C are block diagrams of various embodiments of an exemplary
25 transaction system;

Figure 2 is a block diagram of an exemplary purchaser system;

Figure 3 is a block diagram of an exemplary security system;

Figure 4 is a block diagram of an exemplary wallet server;

Figures 5-8 are exemplary screen displays for an embodiment of a digital wallet
30 formed in accordance with the present invention;

Figure 9 is a flow diagram of an exemplary process executed by an exemplary activator application;

Figure 10 is a message sequence chart of an exemplary login sequence;

Figure 11 is a message sequence chart of an exemplary purchase sequence;

Figure 12A is a message sequence chart illustrating a potential security problem encountered with many scripting languages;

Figure 12B is a message sequence chart of a correct communications flow without the security problems shown in **Figure 12A**; and

5 **Figure 13** is a flow diagram of an exemplary process for reducing or eliminating undesired executable code.

DETAILED DESCRIPTION OF PREFERRED EXEMPLARY EMBODIMENTS

10 The present invention may be described herein in terms of functional block components and various processing steps. It should be appreciated that such functional blocks may be realized by any number of hardware and/or software components configured to perform the specified functions. For example, the present invention may employ various integrated circuit (I.C.) components, e.g., memory elements, processing elements, logic elements, look-up tables, and the like, which may

15 carry out a variety of functions under the control of one or more microprocessors or other control devices. Similarly, the software elements of the present invention may be implemented with any programming or scripting language such as C, C++, Java, COBOL, assembler, PERL, or the like, with the various algorithms being implemented with any combination of data structures, objects, processes, routines or other

20 programming elements. Further, it should be noted that the present invention may employ any number of conventional techniques for data transmission, signaling, data processing, network control, and the like. Still further, the invention could be used to detect or prevent security issues with a scripting language, such as JavaScript, VBScript or the like.

25 It should be appreciated that the particular implementations shown and described herein are illustrative of the invention and its best mode and are not intended to otherwise limit the scope of the present invention in any way. Indeed, for the sake of brevity, conventional data networking, application development and other functional aspects of the systems (and components of the individual operating

30 components of the systems) may not be described in detail herein. Furthermore, the connecting lines shown in the various figures contained herein are intended to represent exemplary functional relationships and/or physical couplings between the various elements. It should be noted that many alternative or additional functional

relationships or physical connections may be present in a practical electronic transaction system.

To simplify the description of the exemplary embodiments, the invention is frequently described as pertaining to a system of electronic commerce running over the Internet. It will be appreciated, however, that many applications of the present invention could be formulated. For example, the system could be used to authenticate users of a computer system, or to activate a passcode system, or any other purpose. Similarly, the invention could be used in conjunction with any type of personal computer, network computer, workstation, minicomputer, mainframe, or the like running any operating system such as any version of Windows, Windows NT, Windows2000, Windows 98, Windows 95, MacOS, OS/2, BeOS, Linux, UNIX, or the like. Moreover, although the invention is frequently described herein as being implemented with TCP/IP communications protocols, it will be readily understood that the invention could also be implemented using IPX, Appletalk, IP-6, NetBIOS, OSI or any number of existing or future protocols.

Furthermore, the customer and merchant may represent individual people, entities, or business while the bank may represent other types of card issuing institutions, such as credit card companies, card sponsoring companies, or third party issuers under contract with financial institutions. The payment network includes existing proprietary networks that presently accommodate transactions for credit cards, debit cards, and other types of financial/banking cards. The payment network is a closed network that is assumed to be secure from eavesdroppers such as the American Express® network, VisaNet® network or Veriphone®.

Additionally, other participants may be involved in some phases of the transaction, such as an intermediary settlement institution, but these participants are not shown. Each participant is equipped with a computing system to facilitate transactions. The customer has a personal computer, the merchant has a computer/server, and the bank has a main frame computer; however, any of the computers may be a mini-computer, a PC server, a network set of computers, laptops, notebooks, hand held computers, set-top boxes, and the like.

Referring now to **Figure 1A**, a transaction system 100 suitably includes at least one user computer 110, a transaction authorizer computer 120, a security server 130 and an optional transaction tool server 140. In various embodiments described in detail herein, the transaction system 100 is used in electronic commerce to conduct

purchase transactions. Specifically, the user computer 110 is a purchaser or customer computer, the transaction authorizer computer 120 is a merchant computer and the transaction tool server 140 is a digital wallet server. It will be appreciated that although the transaction system described herein is an electronic commerce system, the present invention is equally applicable to various other electronic transaction systems.

The various computer systems and servers are interconnected as appropriate by a data network 102, which is any data network such as the Internet or another public data network. Other suitable networks 102 include the public switched telephone network (PSTN), corporate or university intranets, and the like. In various embodiments, such as the one shown in **Figure 1B**, merchant computer 120 is electronically coupled to security server 130 through a data connection 152 separate from network 102. Similarly, various embodiments include a connection 150 separate from network 102 connecting the wallet server 140 and security server 130. Exemplary data connections suitable for use with connections 150 and 152 include telephone connections, ISDN connections, dedicated T1 or other data connections, wireless connections and the like. It will be appreciated that connection 150 and connection 152 may be identical connections, or each may be an entirely different form of connection in various embodiments of the invention.

Various embodiments, such as the one shown in **Figure 1C**, also include an application server 160. In various embodiments, databases (not shown) and/or profile servers (not shown) may be connected to application server 160 and/or wallet server 140. Application server 160 can be used to balance the workload. Spreading the workload between digital wallet 140 and application server 160 can enhance efficiency and/or security. For example, application server 160 may perform some of the functionality performed by the Wallet server 140, such as database access. Because the application server 160 is not connected to the data network 102, security may be enhanced by having database access be performed by the application server 160 instead of the wallet server 140.

While various exemplary embodiments have been illustrated in **Figures 1A-1C**, it will be appreciated that other embodiments are possible. For example, an embodiment may include connection 150 but not connection 152 or vice versa. Furthermore, components (e.g., customer 110, merchant 120, security server 130, wallet server 140 and application server 160) may be individual computers or networked groups of computers acting with similar purpose to fulfill the functions

described herein. Functionality attributed to a single component may be distributed among one or more individual computers in order to fulfill the described functionality. For example, the wallet server 140, may in fact be a collection of Web servers, application servers, database servers and other types of servers.

5 To conduct a transaction, customer 110 suitably establishes a connection through network 102 with a merchant 120. When a purchase is to be consummated, customer 110 accesses wallet server 140. The customer 110 is then redirected to security server 130 to verify that a smartcard is in the customer's possession. The smartcard may include a digital certificate that uniquely identifies the card such that
10 digital credentials relating to the transaction may be created, as described below. In various embodiments, portions of the digital credentials are returned to customer 110 and a portion is provided to wallet server 140 via secure connection 150. Customer 110 may then use the digital credentials to authenticate to a wallet server 140, which may complete the electronic transaction as a proxy for customer 110. Wallet server
15 140 may include functionality for completing purchase forms affiliated with merchant computer 120, for example. When merchant 120 receives a secure purchase instrument identifier from customer 110 or from wallet server 140, card authorization may take place over connection 152 as with any ordinary charge card authorization. As described above, the communications can be performed using various protocols,
20 for example SSL or VPN and the like. Because the smartcard contains identifying information that is unique to the particular card and which can be made known to the network through electronic means, a purchase transaction conducted with the smartcard is more secure than a transaction conducted with an ordinary charge or credit card. A lower discount rate may be justified for the secure transaction, which
25 may be processed by the card issuer as a "Card Present" transaction. Additionally, if the transaction is a "Card Present" transaction, the risk of fraud may be transferred from the merchant to the card issuer.

With reference now to **Figure 2**, an exemplary purchaser computer 110 (also referred to as a client, customer, or user computer) is any computer system that is
30 capable of initiating an electronic purchase transaction on data network 102. In various embodiments, purchaser computer 110 is a personal computer running any operating system 212 such as any version of the Windows operating system available from the Microsoft Corporation of Redmond, Washington or any version of the MacOS operating system available from the Apple Corporation of Cupertino, California.

Purchaser computer 110 suitably includes hardware and/or software to allow a smartcard 202 to interface with a Web browser 216 through operating system 212. Web browser 216 is any program compatible with purchaser computer 110 that communicates via network 102 such as Netscape Communicator available from the
5 Netscape Corporation of Mountain View, California, Internet Explorer available from the Microsoft Corporation of Redmond, Washington, or the AOL Browser available from the America Online Corporation of Dulles, Virginia. In various embodiments, purchaser computer 110 includes a wallet client 214, which is any computer program configured to communicate with wallet server 140. An exemplary wallet client 214 is
10 the Microsoft Wallet, or the Globeset Wallet available from the Globeset Corporation of Austin, Texas, although any wallet program could be used.

Wallet client 214 and browser 216 may interact with smartcard 202 by sending data through operating system 212 to a card reader 204. Card reader 204 is any reader device capable of transferring information between wallet client 214 and
15 smartcard 202. In various embodiments, card reader 204 is an ISO-7816 compatible reader such as the Model GCR410 available from the Gemplus Corporation of Redwood City, California, or any other suitable reader.

Smartcard 202 is any card that is capable of conducting electronic transactions, such as any smartcard that is compatible with the following ISO standards, all
20 incorporated herein by reference in their entirety:

ISO/IEC 7816-1:1998 Identification cards -- Integrated circuit(s) cards with contacts -- Part 1: Physical characteristics;

ISO/IEC 7816-2:1999 Information technology -- Identification cards -- Integrated circuit(s) cards with contacts -- Part 2: Dimensions and location
25 of the contacts;

ISO/IEC 7816-3:1997 Information technology -- Identification cards -- Integrated circuit(s) cards with contacts -- Part 3: Electronic signals and transmission protocols;

ISO/IEC 7816-4:1995 Information technology -- Identification cards -- Integrated circuit(s) cards with contacts -- Part 4: Interindustry commands for interchange;
30

ISO/IEC 7816-5:1994 Identification cards -- Integrated circuit(s) cards with contacts -- Part 5: Numbering system and registration procedure for application identifiers;

ISO/IEC 7816-6:1996 Identification cards -- Integrated circuit(s) cards with contacts -- Part 6: Interindustry data elements; and

ISO/IEC 7816-7:1999 Identification cards -- Integrated circuit(s) cards with contacts -- Part 7: Interindustry commands for Structured Card Query Language (SCQL).

5 An exemplary smartcard 202 is a smartcard in accordance with the ISO 7816 specifications including a model SLE66 chip available from the Infineon Corporation of Munich, Germany. The SLE66 chip includes a memory (such as a 16k memory, although more or less memory could be used) and a processor running, for example, the Multos operating system (such as Multos v.4). In various embodiments smartcard 202 also includes an applet for storing and processing digital certificates or other cryptographic functions. For a basic introduction of cryptography, see "Applied Cryptography: Protocols, Algorithms, And Source Code In C," by Bruce Schneier and published by John Wiley & Sons (second edition, 1996), which is hereby incorporated by reference. For example, an X.509 Java applet could be included on smartcard 202 for processing an X.509 certificate stored thereon. While the embodiments described herein utilize a smartcard, it will be appreciated that other intelligent tokens, for example a global system for mobile communication (GSM) mobile phone, can be substituted for the smartcard in various embodiments of the invention.

20 With reference now to **Figure 3**, a security server 130 suitably includes an interface to network 102, a security engine 304 and an authorization server 306 communicating with a database 310. Network interface 302 is any program that facilitates communications on network 102, such as a Web server. In various embodiments, network interface 302 is based upon Netscape Enterprise Server, available from the Netscape Corporation of Mountain View, California. Network interface 302 receives electronic messages on network 102 and routes them to security engine 304 or authorization server 306 as appropriate.

25 Security engine 304 and authorization server 306 may be separated by a firewall 308. Firewall 308 is any hardware or software control (such as a router access control) capable of restricting data flow between an internal and an external network (not shown). In various embodiments, security engine 304 suitably resides outside the firewall to administer data transfers between the security server 130 and the customer 110 or wallet server 140. Authorization server 306 retains valuable confidential information such as database 310, which may contain a cross-reference of x.509

certificates stored on the various smartcards 202 associated with the system 100, so it may be suitably maintained on an internal network for enhanced security. It will be understood that the functionality of security engine 304 and authorization server 306 may be suitably combined or separated in various ways without departing from the scope of the present invention.

With reference now to **Figure 4**, an exemplary wallet server 140 includes a network interface 402, an optional applet server 404 and a wallet application 406. Network interface 402 is any program that facilitates communications on network 102, such as a Web server. In various embodiments, network interface 402 is based upon Netscape Enterprise Server, available from the Netscape Corporation of Mountain View, California. Optional applet server 404 provides server functionality for distributed programs such as Java programs or ActiveX controls. An exemplary applet server is the Java Applet Server available from Sun Microsystems of Mountain View, California. Applet server 404 and network interface 402 provide support functionality for wallet application 406, which may handle login functionality, retrieve wallet data from wallet database 408, and/or administer transactions as described herein. In various embodiments of the invention, wallet server 140 may include the SERVERWALLET (a.k.a. NETWALLET) program available from the Globeset Corporation of Austin, Texas.

Various embodiments of the invention may include an activator application that suitably helps consumers with the wallet purchase process. The activator application may present status information, for example, or may actively launch the wallet client 214 (Fig. 2) when appropriate. Additionally, the activator may maintain a local cache of sites supported by the wallet.

The activator application program may be implemented as a conventional computer application. In various embodiments, the activator application displays information as a system tray icon, as a "floating bitmap", or in any other suitable manner. The graphical representations (e.g., icons) may indicate status information such as "browsing at a supported site", "browsing at a supported checkout page", "browsing at a supported payment page", "no browser windows open", "browsing at an unsupported page", and/or the like.

A floating bitmap may be implemented with any graphical file or format, for example, a graphics interchange format (GIF) file. Alternate embodiments present information in graphical, audio, visual, audiovisual, multimedia, animated or other

formats. Moreover, GIF files may be replaced with LZW files, TIFF files, animated GIF files, JPEG files, MPEG files, or any other sort of graphical, audio or multimedia format or file.

5 Preferably, the present invention is enhanced by providing a transaction tool with a window which includes controls which allow a user to more easily use the transaction tool. The transaction tool can be used for various electronic transactions. For example, purchase transactions, financial advisory transactions, insurance transactions, consumer-to-consumer transactions, such as barter transactions, transactions relating to offers and rewards, etc. The transaction tool described in detail
10 herein is a digital wallet used for electronic purchase transactions. The digital wallet is enhanced by providing a window with controls for the customer to more easily use the wallet. Preferably, the present invention includes a client-side implementation for accessing digital wallet functionality ("activator") and a server-side toolbar, that allows the user to perform a small download of the activator and utilize one or more control
15 elements of the Operating System User Interface, for example, a Microsoft Windows system tray icon.

The activator is object code that runs on the user's computer and contains routines for accessing the wallet server. The activator can generate events and the activator contains procedural logic which allows for communication with the wallet
20 server in response to specific user and system actions or events. Preferably, the activator presents a single graphical element, for example an icon which in a Microsoft Windows embodiment appears as a Windows system tray icon, and which enables the user to trigger the appearance of the wallet toolbar. In various embodiments, the wallet toolbar is, in effect, a special browser window that accesses the wallet server.
25 The activator communicates with the wallet server to automate the update of the activator object code, via a small download. Preferably, the user is queried for a confirmation prior to performing the activator download. In various embodiments, the activator communicates with applications other than the wallet, for example, offers of rewards.

30 The system provides the content of relevant options on each of its web pages, namely dynamic and contextual information that is specific to each page viewed by the user. This is accomplished by the activator monitoring URLs and potentially keying on pages so that the user can be made aware of potential opportunities. For example, the activator can check to see if the user is viewing a merchant site and present applicable

offers (e.g., discount on merchandise, etc.) to the user. The activator can also monitor versions of software on the user's system and inform the user of possible upgrade versions. In an exemplary embodiment, the system is implemented on any network, such as a WAN, LAN, Internet, or on any personal computer, wireless electronic device
5 or any other similar device. The system can be implemented on an operating system, for example Microsoft Windows, Mac OS, Linux, Windows CE, Palm OS, and others.

The activator, which is preferably implemented on the client side, allows the user 110 to be in constant or intermittent communication with the digital wallet 140 issuer, for example, American Express, without having to have intrusive windows
10 taking up space on the user's display. As described above, this allows the wallet issuer to monitor and present possible items of interest to the user at appropriate times. The configurable controls presented in the window allow the customer to quickly navigate to desired Web sites, and to immediately invoke desired functionality such as digital shopping cart checkout. Preferably, the client toolbar may be a discrete
15 window that associates with the user's browser window, and maintains a geometry that effectively renders it a part of the user's browser. Although when the user clicks on its controls, the window remains in its original state, namely the window directs the browser window to visit desired URLs and invoke specific actions (such as, use of the digital wallet). For example, after selecting a digital wallet icon from the system tray,
20 the digital wallet toolbar 502 is displayed as a discrete window that is associated with the user's browser window 500 as shown in **Figure 5**. In an alternative embodiment, the client toolbar frames the existing wallet window, providing the additional controls as described above in an extension of the window area which is provided by an existing wallet. In another alternative embodiment, the area is divided in the user's standard
25 browser window to create an area that can be used for wallet and the other controls described above.

The system preferably provides a convenient way for customers to not only visit favorite URLs, but also to invoke specific functionality that might otherwise incur many steps, and which might change as the vendors' sites are continually updated. The
30 system also preferably provides a simpler user experience by making the wallet and e-commerce sites not only easy to use, but by making the wallet and client toolbar easy to find. When a user has many different windows open, finding the wallet window can be difficult and annoying, especially as different browser windows seize GUI focus during the course of normal navigation and interaction with sites. As such, use of the

system tray icon and server side functionality provides a superior user experience. In a preferred embodiment, the present system works with any known in the art browser, such as Netscape Navigator.

While prior art systems may simply provide a customizable portal (e.g., MyAmericanExpress.com) that allows a user to visit the page and then traverse links from that page, an exemplary embodiment of the present invention suitably provides a window with controls that will stay on the users' desktop as they navigate throughout the Web. Additionally, the client toolbar provides a means of automating actions for the user, where these actions take place on third party e-commerce sites. Moreover, prior art systems may utilize a separate browser window to render the wallet controls, but the present invention utilizes a standard browser window which has been divided to provide an area for the wallet to occupy. For example, in a preferred embodiment, a digital wallet icon is available to the user as a system tray icon (not shown). Upon invocation of the digital wallet icon, the digital wallet toolbar 502 is displayed as shown in **Figure 5**. The digital wallet toolbar is unobtrusive while including controls which allow the user to utilize the digital wallet. Preferably, the toolbar 502 is associated with the browser window 500.

As shown in **Figure 6**, if the user selects a shopping directory button from the toolbar 502, the toolbar expands to a shopping directory page 602. The user can select a merchant from the list of merchants 604 displayed in the shopping directory page 602. Upon selecting a merchant from the list of merchants 604, the digital wallet takes the user to the selected merchant site 702, such as is shown in **Figure 7**. Preferably, when the digital wallet takes a user to a merchant site 702, the toolbar 502 returns to its normal size.

When the user makes a purchase from a merchant, for example by placing items in a shopping cart and proceeding to checkout at the merchant's site, the checkout function is performed, in part, by the digital wallet of the present invention. As shown in **Figure 8**, when the user indicates a desired purchase at a merchant site 702, the checkout user interface 802 of the digital wallet is displayed. For example, the checkout display 802 appears in one side of the browser window, while the merchant window 702 is still displayed on the opposite side of the browser window. Much of the information that a user would normally have to enter at the merchant checkout (for example, name, address, e-mail address, credit card information, etc.) is

already known by the digital wallet and is pre-filled in the digital wallet checkout window 802. In a preferred embodiment, the user can edit the pre-filled information.

Preferably, the present system also includes methods and apparatus that facilitate the reliable population of HTML forms on Web sites. The end result is that users can identify information content that they wish to provide to sites in a general manner, independent of the actual appearance, labeling, and behaviors of various e-commerce Web sites. Preferably, the present invention includes an "auto-remember" component that allows a user to capture data that is entered and a "form fill" component which includes a powerful set of processes that results from the combination of several different models of sites and users.

The present invention collects information from users, storing it securely and reliably on a server, and then provides it to appropriate form fields under the user's direction. The system maintains mappings of user information to the various HTML form fields of sites that are of interest to the user. This information can then direct how HTML forms are to be filled (or pre-filled) for users who wish to interact with those sites.

With respect to the "auto-remember" feature, prior art digital wallets may implement a remember function, but it must be initiated by the user. With the present "auto-remember" feature, digital wallet users do not need to click a button to remember the form they just filled out because the present system remembers the fields that the user is submitting on a merchant window. When a form is submitted (for example, by pressing a "Submit" button or a "Buy" button), the online wallet responds by determining if the window that triggered the form submission is a merchant window of interest. If so, the wallet suitably remembers the data; otherwise, the wallet can disregard the occurrence of the form submission and continue to run as normal.

The digital wallet controls may include a button labeled "remember", or may also support an automatic remember feature that is always active. In general, fields other than those that are automatically populated by the wallet can be remembered. In this context, remembering a field means that when a user enters data into a specific field, the value will be stored by the system. The wallet component will detect field values entered in this way, and will securely transmit them to a server via the Internet. When a user next goes to this page, the wallet, in addition to populating the form with fields that are retrieved from the wallet system, will also populate the form with values that

had previously been remembered. When processing the form (pre-fill), the wallet will securely retrieve field values from the server.

More particularly, with respect to the Internet Explorer browser, the invention suitably implements an ActiveX control that attaches itself to a Web page such as, for example, the American Express Online Wallet. In a preferred embodiment, the
5 ActiveX control contains a method that captures the browser events of all Internet Explorer browsers, so that the American Express Online Wallet can respond to these events if necessary by a JavaScript function loaded within the American Express Online Wallet, thereby allowing the system to obtain the completely downloaded
10 document within an Internet Explorer browser. Specifically, this allows the system to capture the "Document Complete" event raised by the Internet Explorer browser which specifies when a document has finished loading. When this event is captured, the ActiveX control notifies the American Express Online Wallet by calling a JavaScript function loaded within the American Express Online Wallet. This function responds to
15 this event by suitably communicating with the ActiveX control to capture the "Form Submit" events for all forms on all Internet Explorer browsers.

When a user fills a form on a Web page and clicks the "Submit" (i.e., any control, such as a button, that submits a form) button for that page, the American Express Online Wallet is notified by the ActiveX control calling a JavaScript function
20 loaded within the American Express Online Wallet. The American Express Online Wallet then suitably determines if the document raising the "Submit" event is of interest by checking the URL of the window that raised the event. If the event is to be handled, the American Express Online Wallet must call a suitable function within the ActiveX control that obtains the document object model (DOM) that raised the event. The DOM
25 can then be traversed and the form values can be saved so that they can be sent to the server for storage in memory. In a preferred embodiment, the ActiveX control must properly detach itself from capturing the browser events and form "Submit" events so that runtime errors are minimized.

With respect to the Netscape browser, because of Netscape's implementation of
30 events, the system captures the event from within JavaScript alone. If the system successfully obtains the "Universal Browser Write" privilege (i.e. granted by the user), the system can then successfully call a function that allows an external window to capture events of another window. The system then can traverse the document object model for all frames of that window. When doing so, the system notifies each form of

the window that the system wants to capture the "Submit" event. As such, when a user fills a form on the window that the system notified and clicks the "Submit" button (i.e., any control, such as a button, that submits a form) for that page, the online wallet is notified and suitably responds. One skilled in the art will appreciate that the present invention may be implemented in any suitable transaction system, including, but not limited to any suitable digital wallet system.

With respect to the form fill function, the digital wallet, such as, for example, the American Express Online Wallet, provides a form fill functionality to aid users in populating forms. Prior art systems, such as the system provided by GlobeSet, Inc., typically use a Browser Helper Object (BHO). The BHO approach often includes disadvantages such as, for example, the Internet Explorer 5.0 browser has a bug where it will only load the first BHO specified in the registry. This is a problem for any application since it can't be sure whether its BHO is loaded or not. Moreover, a BHO is loaded for each instance of Internet Explorer such that multiple instances of a BHO could be running at any given time – therefore eating up memory and slowing down navigation for all browsers versus only the one of interest.

The present invention preferably replaces the BHO solution by using the same ActiveX control as specified in the "auto remember" feature. By attaching an ActiveX control to the Online Wallet Web page, the system suitably obtains the document object model for any document loaded within any given Internet Explorer browser by using, for example, the Shell Windows API. When a user clicks a "Fill Form" button on the Online Wallet, the wallet can respond by first obtaining the document object model through the ActiveX control. Next, the wallet can save the names of the fields that make up forms and send them to a heuristic engine on the server. The server will respond to this request by returning the values that should be used to fill these fields. The fields can then be filled using the same document object model obtained earlier. As such, the present invention reduces the problem of having to enter repetitive data in forms at Web sites. In addition to saving effort on part of customers, it increases accuracy of the entered data.

More particularly, the architecture of the present invention combines a server-side model of each site (e.g., fields, pages, links, etc.), server-side model of user (e.g., profile), user generated model of site (e.g., macro recording, tagging, drag and drop) model of site manually generated by system (e.g., to augment and validate the user generated models), and heuristically generated model of site (e.g., inference

of semantic information about fields, actions, etc.). The present system creates and stores several distinct types of models. The first characterizes the site, for example, how do you check out, how do you add something to a shopping cart, how do you search for a type of product, how do you enter preferences (e.g., travel), etc. The
5 second model characterizes the user, for example, what are the things that a user can do and what are the profile attributes of a user. By combining these two models, the present system creates special processes that add great flexibility and power. The system maps from the model of what a user can do, to the model of the site, wherein the site models are generated by any known method. As such, the site model can be
10 created by the user, by the host, by the transaction card company (issuer) or even by the site provider. In a preferred embodiment, ECML/XML can be used to represent models for the site. In various embodiments site models can be exchanged with other systems.

For example, a user may routinely visit sites of different airlines and travel
15 services in order to purchase airline tickets. Each site typically has fields on different screens for collecting information that are relatively similar between the various sites. However, each site will use different HTML form fields that are placed on different URLs, and which may also change over time. Even though the information is very similar in nature across the different sites, there is presently no common mechanism to
20 automate the process of populating fields for user travel preferences (e.g., seating, meals, travel times, affinity rewards, etc.). Each site may have its own profile of the user which stores much of this information. However, the user would still need to create such a profile for each site independently, given the current practice.

The present invention includes heuristics based field recognition. In this
25 approach, field labels are identified by their spatial proximity to form fields of interest. A combination of field labels and form field HTML attributes (most notably the "name" attribute of the HTML "input", "select", and "action" elements) will be used as input to a heuristic engine that contains a dictionary to aid the identification of desired fields.

In another embodiment, the present invention includes user mediated field
30 recognition. In this approach, the user willfully captures input via a "Remember" button or similar control that allows servers to capture information about the sequence of actions the user executes. When the user does this, he or she can effectively "play back" the actions (similar to macro scripting employed in other software systems). As

such, the user's actions can be fed into the heuristic engine and also be fed directly into field mapping tables that are used by the processes of this engine.

In a preferred embodiment, the above two approaches may need some manual interaction in order to completely create process maps and form field maps that accurately depict the navigation and form field completion possibilities that enable this invention. When necessary, human analysts will operate in a fashion similar to what occurs during user mediated field recognition, although they will provide far more information about their navigation and form filling processes than would the typical user. In all cases, the information that is gathered is used to create a process map (or detailed site map) that depicts the sequence of actions (form fill, HTTP Post, HTTP Get, etc.) by which various activities can occur. A field map will also be generated for each of the Web pages in the process map, wherein the field map defines the precise names of fields that can be used to automate form submission. State maps may also be required to track the states of users as they interact with the Web site (the state of the user, such as logged on vs. not logged on, will modify the results of specific actions on the site).

In a preferred embodiment, the process by which the user interacts can either be fully automated (in which case the user merely conveys the desire to perform a scripted action) or can be user mediated (in which case the invention can pre-fill form fields for the user, thereby affording the user the opportunity to correct, change, or complete any fields that require further data entry). In addition to the products and services described above, the enabling technology in the form of the process and field maps can be leveraged for new products and services, such as enabling companies to automate the entry of form data for their site visitors. For example, if a company compiled process and field maps for the benefit of their own customers (by any of the means described above), then the company can also license this information, services, and products to third party customers. The sites for which these maps exist may also use the present invention such that the sites benefit by delivering a similar service to their customers who are not benefiting from the system. The underlying processes themselves will also rely on a system which acquires this information and reformats it, for example, as XML and ECML. These standard representations would form the basis of information exchange for the latter two products/services.

With reference now to **Figure 9**, a process 900 implemented by an exemplary activator program suitably includes initializing the application (step 902), monitoring the

uniform resource locator (URL) as the user browses or shops online (step 904), determining whether the user is browsing at a supported site (step 906), determining the type of supported site (steps 908 and 912) and responding appropriately at processing steps 910 and 914 (respectively). Other features (such as coupons, special offers, monitoring, security and the like) may be implemented at step 916.

5 Initialization step 902 suitably involves opening the activator application and initializing the application as appropriate. The activator application may be initialized in response to system startup, connection to a network (such as the internet or a LAN), or initialization of a browser (such as Internet Explorer, available from the Microsoft Corporation of Redmond, Washington or Netscape Explorer, available from the
10 Netscape Corporation of Mountain View, California). In various embodiments, the activator application may contact the wallet server 140 (**Figure 1**), wallet application 406 (**Figure 4**) or another server on network 102. The activator application suitably contacts the remote server to obtain information such as a list of Web sites, domain
15 names, or URLs that are supported by the wallet. This information may be obtained on a regular basis (e.g. daily, weekly, monthly, or at each initialization of the agent application) or when polled by the activator application or the server. In various embodiments, the activator application stores the list of supported URLs in a cache or file on a local drive, or in memory on the client computer.

20 As the user browses the Internet or other data network 102, the activator application suitably monitors the location of the user on the network. One method of monitoring the user's browsing is to monitor the URL used by the user's browser. In such embodiments, the activator application obtains the present URL from the users' browser (or from the system network interface, as appropriate) and compares (step
25 906) the present URL against the list of supported URLs obtained from the remote server in initialization step 902. These comparisons are shown in logically separate steps 906, 908, 912 and 916 in **Figure 9**, although these steps could be combined or separated in any fashion without departing from the ambit of the invention. For example, although **Figure 9** shows multiple comparisons being executed, a single
30 comparison of each present URL against the list of supported URLs may be sufficient in certain embodiments.

If the present URL corresponds to a supported URL, the activator application responds appropriately. For example, if the present URL is a supported checkout page (yes in step 908), the activator application executes a checkout process (step

910). The checkout process may include notifying the user that the checkout page is supported through a pop-up message, or by displaying a particular icon in the system tray or in the floating window. If the wallet client application 214 is not already open, the activator application may present a dialog box or other prompt to the user
5 indicating that the page is supported by the wallet application 214. The prompt may also provide a button or other mechanism by which the user may open the wallet application 214.

If the present URL corresponds to a supported payment page (yes in step 912), the activator application may provide payment instructions to the wallet application, or
10 otherwise pass control to the wallet application (step 914). Messages sent between the activator application, the wallet application, the browser, and the like may be sent by Open Desktop messages, Object Linking and Embedding (OLE) messages, object routine calls, OS calls, or the like.

In various embodiments, the functionality described above is accomplished
15 using cookies as described next. Cookies are used to detect a valid user context. If a valid user context is detected, the activator will either: launch a server application or launch a server toolbar that enables the user to launch other applications. For example, a user's browser might have several cookies that signify the ability to purchase via either a private payment or a specific card product. The activator may
20 launch a toolbar that allows the user to select a desired payment instrument (e.g., from private payments or a card in the user's digital wallet). It will be appreciated that the available applications are not all necessarily related to a purchase transaction. In various embodiments, the context information is stored both on a server and in cookies associated with the browser. For example, the cookies might act as a key by which the
25 context information can be retrieved from the server.

Other functionality (step 916) may also be incorporated into the activator application. For example, security mechanisms (such as those described above and below), customer monitoring functions, coupons, special offers and the like could be implemented. In the case of coupons or special offers, the activator could sense the
30 present URL as corresponding to a particular product or Web page. When the user "surfs" or browses to the particular supported URL, the activator application notices the match and presents the user (via a dialog window, or via the browser, or the like) with a special offer, such as an opportunity to purchase a particular product or to receive a special discount on a purchase. It will be appreciated that other functionality could be

incorporated into the activator application without departing from the ambit of the present application.

In various embodiments of the invention, wallet client 214 (**Figure 2**) is pre-filled with information that is specific to the particular user/customer. With reference to **Figure 1**, a user may apply for a digital wallet by contacting a Web server such as wallet server 140 on network 102. The user completes a registration form (which may be generated with CGI scripts, for example) to apply for the wallet. Wallet server 140 suitably receives demographic, account and other information (e.g. address, shipping address, name, credit card number, and the like) from authentication server 306 (**Figure 3**) or another server on a private network. This information may be used to configure a wallet client 214 (**Figure 2**) that is unique to the particular user. One method of configuring the wallet client 214 is to create a configuration file that is associated with client 214 and that is read by client 214 to obtain wallet information as described above.

Preferably, the registration information also includes card reader information which includes whether the card reader port should be serial or USB port. If the wallet application is approved, a card reader may be shipped or otherwise provided to the user, and a special code (such as a cryptographic key, or a password, or any other sort of electronic or printed code) is also provided to the user. The user then registers for online wallet service by electronically contacting wallet server 140 and authenticating to the server with the card and/or with the special code. After providing the special code, the user receives a specially configured copy of the wallet software, which may be installed on customer computer 110, as appropriate. The wallet pre-fill procedure may be used with any credit card or charge card by simply associating a version of the wallet program with a special code. Configuration information for a particular user is associated with a code that is provided to the user, who may later present the special code to authenticate him/herself with wallet server 140 to obtain a copy of the wallet that has already been pre-configured with data specific to the particular user.

With primary reference now to **Figures 1 and 10**, customer 110 suitably initiates a transaction by logging in to wallet server 140 using smartcard 202. To log in to the wallet server 140, customer 110 first may connect to the security server 130 via browser 216. The user selects a particular uniform resource locator (URL) for the login page through a bookmark, an internet shortcut, a hyperlink, or any other suitable technique. Security server 130 may then return a login page via network interface 302.

In various embodiments, a form entry and submission button for user/password login and a hypertext link for smartcard login are provided as part of the login page. The user selects smartcard login, and browser 216 suitably responds by forwarding log on request message 1002 (**Figure 10**). Security server 130 receives logon request 1002
5 and initiates the smartcard logon process as appropriate. In various embodiments, security server 130 formats a cryptographic challenge by authorization server 306 or security engine 304 in response to logon request message 1002. Cryptographic challenge 1004 is any sort of challenge message that prevents replay attacks (e.g., fraudulent messages created by re-sending previously sent authentication packets),
10 such as a challenge that is based upon random data and is designed to solicit a response from the X.509 application stored on smartcard 202. The challenge is then suitably provided to customer 110 via network 102 as challenge message 1004.

Upon receipt of challenge message 1004, browser 216 suitably passes message 1004 to wallet client 214 for processing with smartcard 202. If wallet client
15 214 is not running, browser 216 may automatically open the program. Wallet client 214 then prepares the signature response, as appropriate. For example, wallet client 214 may extract the server challenge information, format a new client challenge (i.e., a second cryptographic challenge for smartcard 202), combine both challenges into a dual challenge, and compute a hash of the dual challenge for later use, for example, in
20 a Public-Key Cryptography System 1 (PKCS1) cryptographic block. The hash may be computed according to any algorithm such as MD3 or MD4, for example, and is suitably used to guarantee the completeness and accuracy of the data in the dual challenge block. It will be understood that PKCS1 is a public key cryptography standard defining mechanisms for encrypting and signing data using RSA public-key
25 cryptosystems. The PKCS standard is fully defined in PKCS #1: RSA Cryptography Specifications Version 2.0 dated September 1998 (available online from <http://www.rsa.com/rsalabs/pubs/PKCS/html/pkcs-1.html>) and incorporated herein by referenced in its entirety.

The PKCS1 block is suitably provided to smartcard 202 via reader 204 for
30 processing (step 1006 in **Figure 10**). In various embodiments, card reader 204 interacts with customer computer 110 to prompt the user for a personal identifier, for example a personal identification number (PIN) or other unique identifier, to access the card. In a preferred embodiment, a PIN is stored on smartcard 202. Alternatively, a PIN or other personal identifier may be stored elsewhere on the system, for example,

on the reader 204 or the customer computer 110. The user suitably enters the personal identifier as appropriate to unlock smartcard 202, which receives the dual challenge block from wallet client 214 and digitally signs the block as appropriate. In various embodiments, smartcard 202 contains a private key that is used to compute a digital signature of the block. The signed block is then returned to wallet client 214, as appropriate. In various embodiments, smartcard 202 also provides a certificate (such as an X.509 certificate) that corresponds to the private key used to compute the digital signature.

After receiving the signature and certificate from smartcard 202, wallet client 214 suitably creates an appropriate response message 1008 to be sent to security server 130. Although response message 1008 may be in any format, various embodiments format response message 1008 as a PKCS7 message as defined in PKCS #7: Cryptographic Message Syntax Standard, An RSA Laboratories Technical Note, Version 1.5, Revised November 1, 1993, available online from <ftp://ftp.rsa.com/pub/pkcs/doc/pkcs-7.doc> and incorporated herein by reference in its entirety.

After receiving response message 1008, security server 130 processes the message as appropriate (step 1010 in **Figure 10**). In various embodiments, response message 1008 is routed to authorization server 306, which verifies the certificate and signature provided by smartcard 202. Upon successful verification of the certification and validation of the signature, in various embodiments a security token may be generated and returned to the customer 110 or smartcard 202.

In this manner, subsequent presentation of the Security token provides a means for the user to establish identity and securely interact with the wallet server. In various embodiments, authorization server 306 may also create an additional security token that identifies the user. In various embodiments this token may consist of multiple portions which can then map to an appropriate digital certificate, smart card, or other data, possibly utilizing data in database 310. In various embodiments, the additional security token and/or portions therein may be provided to customer 110 in conjunction with redirect message 1012. In various embodiments, the additional security token may be provided to the customer or maintained on authorization server 306.

Upon receipt of redirect message 1012, customer 110 suitably contacts wallet server 140 to request a connection. In various embodiments "Request connect" message 1014 suitably includes the security token and possibly the additional security

token in entirety or part as part of redirect message 1012. Wallet server 140 queries the security server 130 using some combination of security tokens in whole or part to obtain identification of customer 110. The query 1016 and response 1018 are suitably transmitted across network 150, which in some embodiments is maintained separate
5 from network 102 to enhance the security of the system 100. An alternative embodiment employs network 102 that in some embodiments affords enhanced security by Virtual Private Network, SSL protocol, use of shared secrets, and/or other cryptographic means. If the return credentials 1018 are in order, wallet server 140 retrieves the attributes corresponding to customer 110 from wallet database 408 and
10 notifies customer 110 of a successful login via message 1020. It will be appreciated that alternate embodiments of a logon sequence are possible. It will also be appreciated that any sort of encryption schemes, message formats and the like could be used to implement a login sequence 1000.

Referring now to **Figure 11**, an exemplary authentication flow 1100 suitable for
15 use during a purchase transaction begins with a customer 110 placing a request 1102 with wallet server 140 for an event (such as a purchase) for which authentication is required. Wallet server 140 suitably recognizes the event and submits a request message 1104 to the security server 130, for example, via communication channel 150, to format a challenge message. Authentication server 306 (or some other
20 component of security server 130, as appropriate) then formats a challenge message 1106 (which may include random data) and provides the challenge message 1106 to wallet server 140, for example, via connection 150. Wallet server 140 receives the challenge message 1106 and forwards the challenge data to browser 216 as signature request message 1108. Browser 216 opens wallet client 214, if necessary, and
25 forwards signature request message 1108. As described above, wallet client 214 formats a signature request block such as a PKCS1 block including a server challenge, a client challenge and a hash. The resultant signature request block is provided to smartcard 202 via reader 204. Smartcard 202 suitably signs the block and provides a copy of its X.509 certificate, as appropriate.

30 The signed block may then be returned to wallet client 214, which suitably formats an appropriate signature response message 1110 (such as a PKCS7 message) and sends it to wallet server 140. Wallet server 140 then formulates validity check message 1112, which includes data from signature response message 1110 and the security token associated with customer 110 during the logon process (such

as the exemplary logon process shown in **Figure 10**). In alternate embodiments, the security token provided is received from customer 110 as part of signature response message 1110. Validity check message 1112 is sent to security server 130 via connection 150, as appropriate. Security server 130 may then route validity check message to authorization server 306, as appropriate, which may check the signature and retrieve the appropriate security token from database 310 (step 1114 in **Figure 11**). The security token and/or optional unique identification code retrieved from the database is then compared to the security token or ID received from the wallet server 140. If the two objects (e.g., security tokens or IDs) match, it can be deduced that the card presently used by customer 110 is the same card used by customer 110 at the time of log on. An appropriate approve or reject message 1116 is then sent from security server 130 to wallet server 140, and the transaction is allowed to proceed.

In various embodiments, wallet server 140 acts as a proxy for customer 110 during transactions. For example, wallet server 140 may complete purchase forms including shipping address, card number, and the like on behalf of purchaser 110. Merchant 120 may then authorize the purchase transaction as a standard charge card transaction using conventional hardware and software. It will be realized, however, that the added security provided by the systems disclosed herein will allow added confidence in the identity of the purchaser, thus justifying a lower discount rate for the transaction.

Various embodiments of the invention incorporate an added protection against security breaches. Because many server-side functions incorporated into security server 130 or wallet server 140, for example, may incorporate various scripting components written in scripting languages such as JavaScript (as defined by Sun Microsystems of Mountain View, California) or VBscript (as defined by the Microsoft Corporation of Redmond, Washington), servers coupled to network 102 may provide various functionality to the multiple clients 110 through such server languages by providing scripts (or code) from the server to the client. The code is interpreted, compiled or otherwise executed by client computer 110. In embodiments incorporating JavaScript, for example, scripts are interpreted and executed by a browser program (e.g. Internet Explorer, Netscape Communicator or the like) running on client computer 110. Other embodiments include other non-PC browsers, for example Wireless Application Protocol (WAP) phones that support Wireless Markup Language(WML) scripts. The various scripting languages may contain instructions, objects or other data

mechanisms for accessing files on the user's hard drive, for example, or for otherwise manipulating data on the user's computer. To prevent unauthorized sources from providing executable code to the user, the scripting languages may include a mechanism for allowing the user to approve scripts provided only from trusted sources.

- 5 For example, a user conducting an electronic transaction as described above may allow scripts provided from the wallet server to execute, but may prevent other scripts provided by other sources from executing on the user's computer.

A potential security problem encountered with many scripting languages is shown in **Figure 12A**. An unscrupulous "cracker" may create a Web site 1204 that is
10 designed to perform malicious activities against users of a legitimate Web server 1206. The cracker site 1204 (shown as the "criminal site" in the figure) may, for example, provide a portion of code, such as a script, to the user. The criminal site 1204 may also induce the user's Web browser 216 to request a particular uniform resource locator (URL) at the legitimate server 1206 (such as the wallet server 140, or any other
15 server on network 102). The referenced URL may be deliberately crafted such that the legitimate server 1206, returns, for example, an error message or other response to the client browser 216. In various embodiments, the response from the legitimate server 1206 may automatically include a portion or variation of the request from the user's Web browser 216. If that response includes JavaScript, VBscript or other code
20 generated as a result of the malicious intent of the criminal site 1204, then the code may be executed on the user's computer. This example illustrates one of many techniques in which a "cracker" may induce a legitimate Web server 1206 to send malicious instructions to a user's Web browser 216. Because the various coding and scripting languages contain instructions for accessing the host computer's file system, registry, or the like, it will be understood that the unauthorized execution of such code
25 is highly undesirable. Nevertheless, the technique shown in **Figure 12A** may allow scripting or other code from a criminal site 1204 to be provided to a user's computer. Because the users' computer thinks that the scripting came from a trusted source (i.e. the wallet server), the client's computer may execute the code from the criminal site,
30 thus creating the potential for damage, unauthorized data dissemination or destruction, or the like. **Figure 12B** illustrates the correct communication flow that should occur (as opposed to the criminal attack flow shown in **Figure 12A**).

To prevent this potential security problem, various embodiments of the invention suitably include techniques for reducing or eliminating undesired executable code.

With reference to **Figure 13**, a process 1300 for reducing the likelihood of script attacks suitably includes the steps of limiting the portions of the server having elevated permission (step 1302), removing dangerous characters within that portion of the site (step 1304), encoding certain characters where necessary (step 1306), and optionally logging data that is provided to users from the relevant portion of the Web site (step 1308).

With regard to step 1302, a Web site typically includes various pages, each page having a unique URL. Users of the site may place elevated trust in certain servers (such as those corresponding to financial institutions or merchants who are reputable). By restricting the elevated trust to only a portion of the Web site (e.g., a limited subset of URLs corresponding to the trusted Web site), the level of trust afforded to the rest of the site is suitably reduced and security is enhanced. Trust may be restricted to a limited portion of the site by configuring the user's Web browser to trust only a portion of the site, for example. The user's Web browser may be configured manually or by a configuration script provided by a wallet server, for example. When only certain pages (e.g. a portion) of the Web site are enabled with heightened trust, any scripts included in references to other pages will either not be executed or will not be executed with heightened trust.

In addition to (or as an alternative to) configuring the client such that the client only "trusts" a certain portion of the server, the server may be configured to improve the security of the client-server interaction. For example, scripting with heightened trust may be disallowed on most of the server to improve security. Moreover, data provided to the trusted portion of the Web site may be monitored and/or modified before being returned to the user (steps 1304 and 1306). Most scripting languages require certain characters for formatting commands. For example, the JavaScript language is frequently encoded with script instructions placed between angle brackets (" $<$ " and " $>$ "). Hence, the angle brackets may be removed from any content that will be returned by a trusted portion of the Web site. If a Web page provided from a trusted portion of the Web site were to include a "criminal" JavaScript program attempting to use angle brackets, for example, the script instructions would not execute on the user's computer because the script instructions would not be properly formatted after removing the angle brackets. Alternatively, certain "dangerous" characters (such as the angle brackets in JavaScript) may be returned in an alternate format, for example, in "ampersand notation" with an ampersand (" $\&$ ") and an American Standard Code for

Information Interchange (ASCII) value for the particular character, or by replacing the "dangerous" character with a safe character, such as the "space" character (step 1306). It will be appreciated that any characters could be eliminated or encoded in various embodiments of the invention depending upon the particular languages, scripting environments, and the like that may be utilized.

In various embodiments, an optional step 1308 suitably includes maintaining a data log of information provided by the various portions of the Web site. All content in which characters have been encoded or removed can be logged so that the log can be reviewed to determine if the Web site is being used to compromise a network client.

For example, all content provided from the Web page, all content provided from within the trusted portion, all content having scripting/programming content, all content from outside the trusted portion, or any other part of the Web site content could be logged into one or more datafiles. The datafiles may be suitably searched or otherwise consulted to determine whether there have been attempts to provide unauthorized content to users by the server.

In some cases internal machines can be attacked by a "criminal" site sending content that contains script to a network server that can log the content in audit trail (e.g., log) files. Given that a browser may have been configured a heightened trust for files residing on the server, in various embodiments, when a user reviews the audit trail files of Web and other e-commerce servers by using the browser, a script may be executed on the network client with the trust level of the network server that delivered the audit trail records (e.g., with a heightened trust level). Execution of this script may cause an attack which may occur long after the script was sent to the network server. This attack is preventable using the same methods and procedures described above to prevent cross site scripting, such as the "criminal" attacks described above. A filter, such as the one described in **Figure 13**, running on a network server, such as a Web server, or running on a network client, such as a PC browser, can filter for script control characters and encode the characters, reject the characters or reject the entire record.

The corresponding structures, materials, acts and equivalents of all elements in the claims below are intended to include any structure, material or acts for performing the functions in combination with other claimed elements as specifically claimed. The scope of the invention should be determined by the allowed claims and their legal equivalents, rather than by the examples given above.

CLAIMS

What is claimed is:

- 5 1. A method for conducting a transaction, the method comprising:
 - a. receiving a transaction request (1102) from a user (110) at a server (140);
 - b. issuing a challenge (1106, 1108) to the user (110);
 - c. receiving a response (1110) from the user (110) based upon said challenge (1108);
 - 10 d. processing (1114) said response to verify an instrument;
 - e. assembling credentials for the transaction (1114), said credentials comprising at least one key;
 - f. providing at least a portion of said credentials to said user;
 - 15 g. receiving a second request from said user, said second request including said portion of said credentials; and
 - h. validating said portion of said credentials with said key to provide access to a transaction service.
- 20 2. The method of Claim 1, wherein the transaction is an electronic purchase transaction.
3. The method of Claim 2, wherein the electronic purchase transaction is conducted using a digital wallet.
- 25 4. The method of Claim 1, wherein the instrument is a smartcard.
5. A method for protecting a network server from being used as the basis of an attack on a network client, the method comprising:
 - 30 a. restricting access to said network server (1302) to a portion of said network server for at least a selected protocol; and
 - b. scanning said portion of said network server for particular characters (1304), said particular characters being associated with said selected protocol.

6. The method of Claim 5, further comprising removing said particular characters (1304) such that a security risk posed by said selected protocol is reduced.
- 5 7. The method of Claim 5, further comprising replacing said particular characters with benign characters (1306) such that a security risk posed by said selected protocol is reduced.
- 10 8. The method of Claim 5, wherein said characters are hostile characters and wherein if a request contains any of said hostile characters, the request is rejected.
9. The method of Claim 5, further comprising logging said particular characters to form a security log (1308).
- 15 10. The method of Claim 9, further comprising reviewing said security log to determine whether said particular characters are hostile.
- 20 11. The method of Claim 5, wherein said protection of the network server is accomplished during an electronic purchase transaction.
12. The method of Claim 11, wherein the electronic purchase transaction is conducted using a digital wallet.
- 25 13. A transaction system (100), wherein the transaction system comprises:
- a. a user computer (110), wherein said user computer is operated by a user;
 - b. a transaction authorizer computer (120);
 - c. a data network (102), wherein when the user wishes to execute a transaction, a connection is established between said user computer and said transaction authorizer computer via said data network; and
 - d. a security server (130), wherein a connection is established between said security server and said user computer to verify that an intelligent token is in the user's possession.
- 30

14. The transaction system of Claim 13, further comprising a transaction tool server (140).
- 5 15. The transaction system of Claim 13, wherein the user (110) is a purchaser, the transaction authorizer (120) is a merchant and the user and merchant consummate a purchase transaction.
16. The transaction system of Claim 15, further comprising a wallet server (140).
- 10 17. The transaction system of Claim 13, wherein the user computer (110) comprises a transaction tool (214) and a reader (204), wherein said reader is capable of transferring information between the transaction tool and the intelligent token (202).
- 15 18. The transaction system of Claim 17, wherein said transaction tool (214) is a wallet client.
19. The transaction system of Claim 13, wherein the intelligent token (202) is a smartcard.
- 20 20. The transaction system of Claim 13, wherein the connection between said security server (130) and said transaction authorizer computer (120) is through a data connection separate from said data network (152).
- 25 21. The transaction system of Claim 17, wherein said transaction tool (140) communicates with said security server (130) via a data connection separate from said data network (150).
- 30 22. The transaction system of Claim 13, wherein the intelligent token (202) comprises a digital certificate that uniquely identifies the user associated with the intelligent token.

23. The transaction system of Claim 22, wherein the user of said intelligent token unlocks access to the digital certificate by use of a personal identifier.
- 5 24. The transaction system of Claim 13, wherein the intelligent token is issued by an issuer and wherein a transaction made using said transaction system is considered a "card present" transaction as deemed by the issuer of the intelligent token.
- 10 25. A digital wallet comprising:
a. at least one server; and
b. an activator for accessing said at least one server, wherein said activator exchanges information with said at least one server.
- 15 26. The digital wallet of Claim 25, wherein said at least one server includes a digital wallet server.
27. The digital wallet of Claim 25, wherein said at least one server includes at least one non-wallet application.
- 20 28. The digital wallet of Claim 25, wherein a client window is displayed in a browser window.
29. The digital wallet of Claim 25 further comprising a toolbar (502).
- 25 30. A digital wallet comprising:
a. at least one server; and
b. a toolbar (502).
- 30 31. The digital wallet of Claim 30, wherein said digital wallet further comprises an activator.
32. The digital wallet of Claim 31, wherein said toolbar performs a small download of said activator.

33. The digital wallet of Claim 30, wherein said toolbar utilizes an operating system control element.
- 5 34. The digital wallet of Claim 33, wherein the operating system control element is a system tray icon.
35. The digital wallet of Claim 30, further comprising a transaction authorizer window.
- 10 36. The digital wallet of Claim 35, wherein said toolbar is a discrete window that associates with the transaction authorizer window.
37. The digital wallet of Claim 30, further comprising a form fill component which allows a user to pre-fill forms.
- 15 38. The digital wallet of Claim 37, wherein the form fill component comprises a model that characterizes a transaction authorizer site.
39. The digital wallet of Claim 37, wherein the form fill component comprises a model that characterizes a user.
- 20 40. The digital wallet of Claim 37, wherein the form fill component comprises:
a. a model that characterizes a transaction authorizer site; and
b. a model that characterizes a user.
- 25 41. The digital wallet of Claim 30, further comprising an auto-remember component.
42. The digital wallet of Claim 36, wherein the auto-remember component includes heuristics based field recognition.

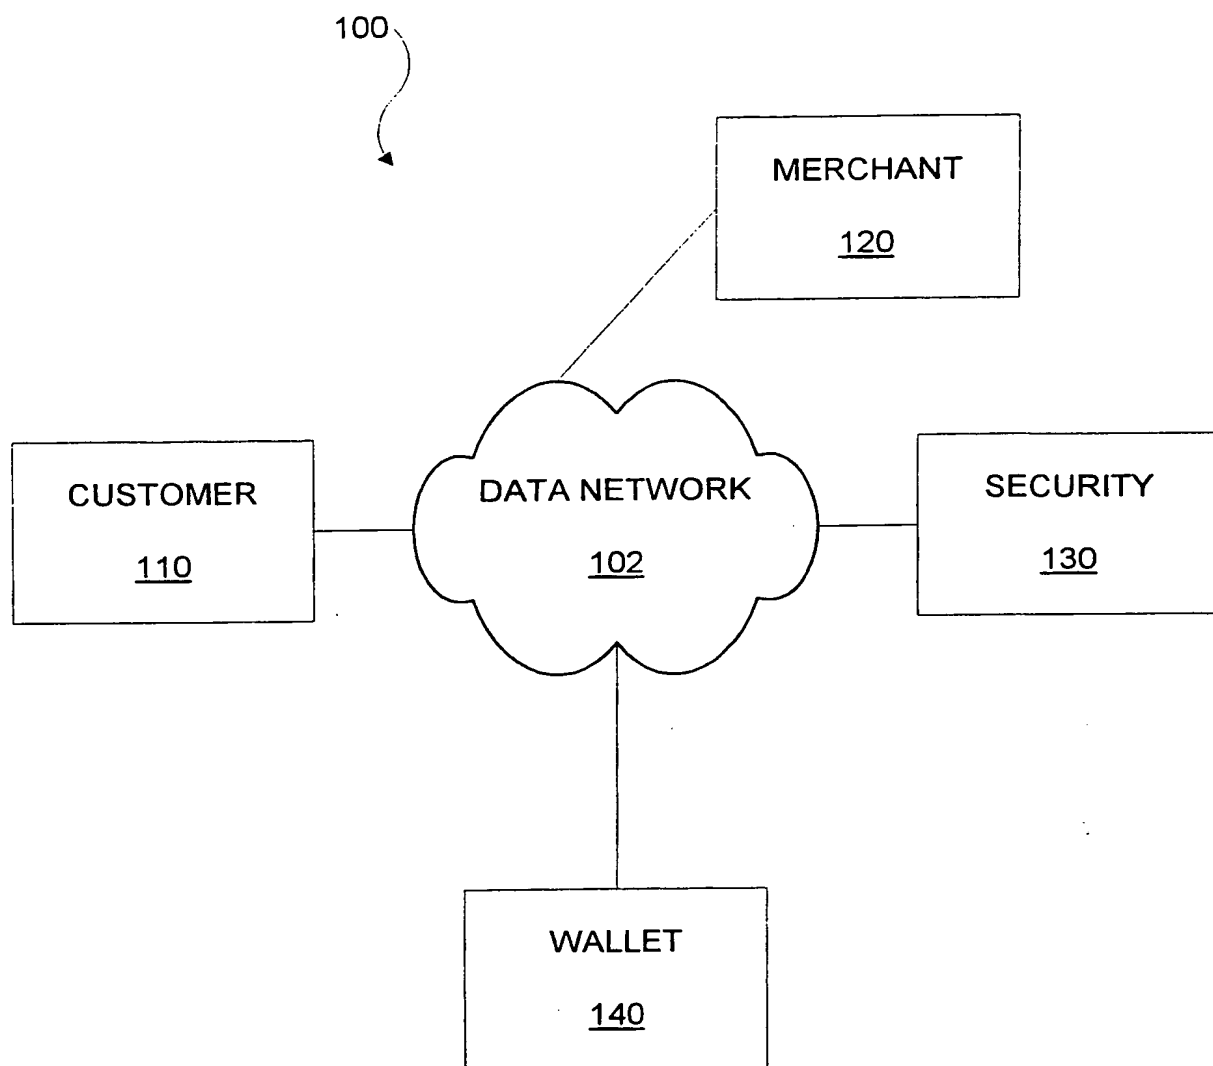


FIGURE 1A

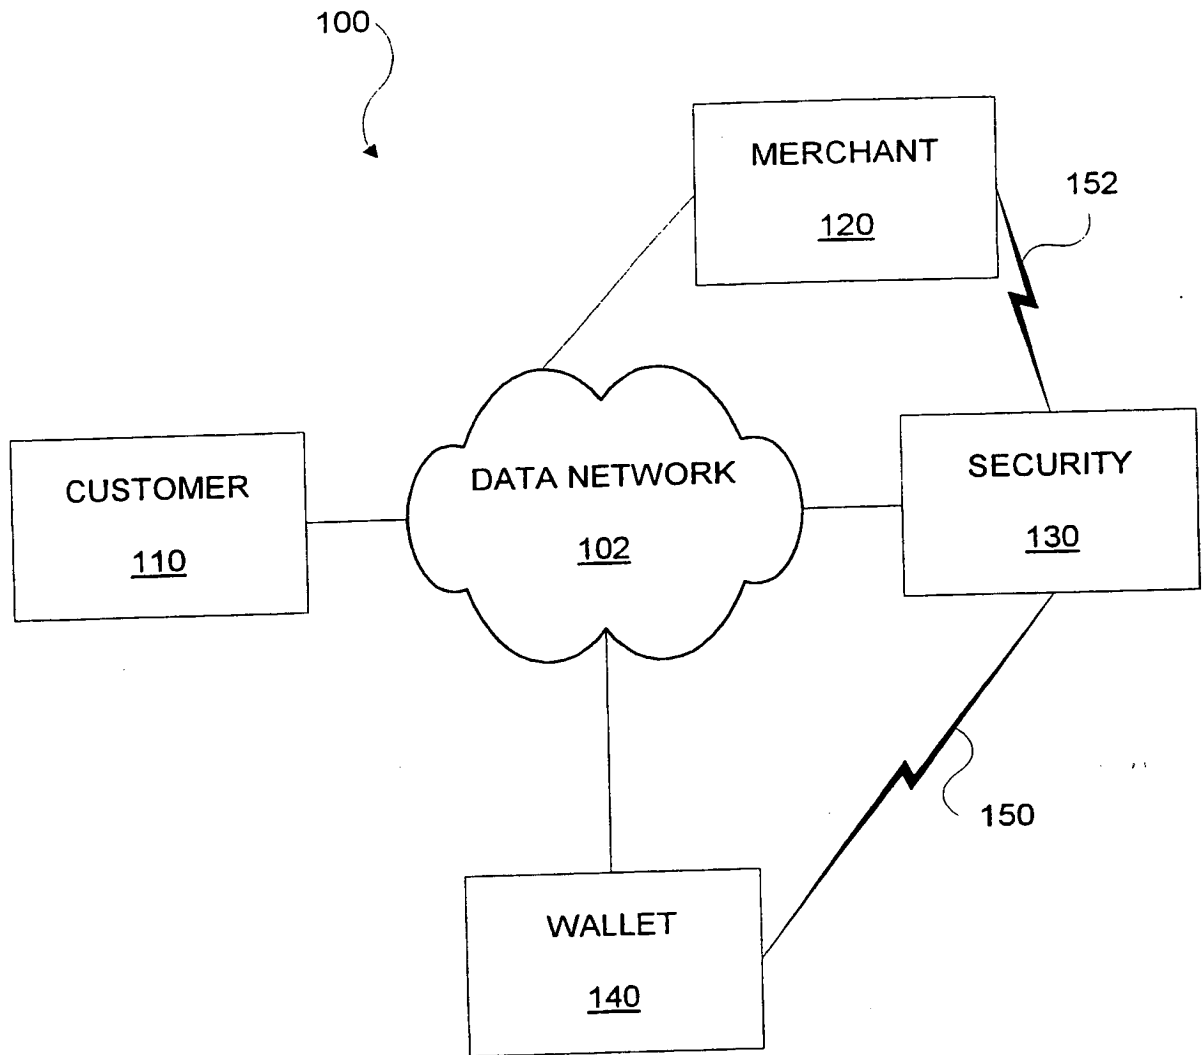


FIGURE 1B

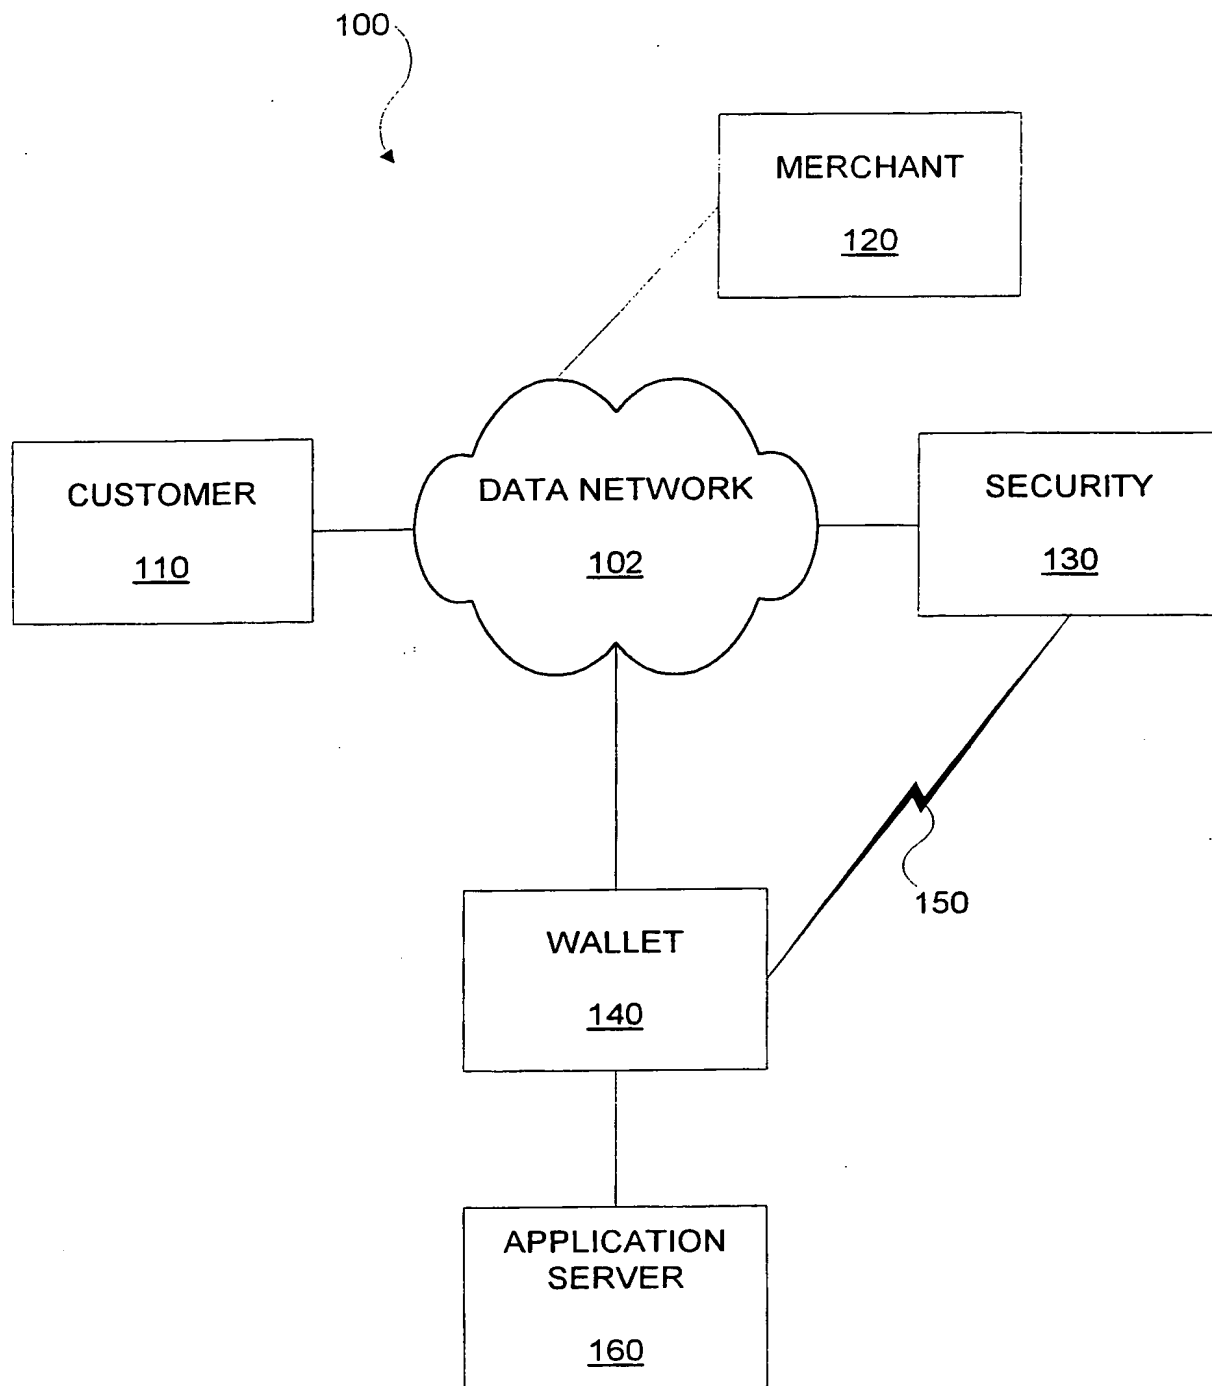


FIGURE 1C

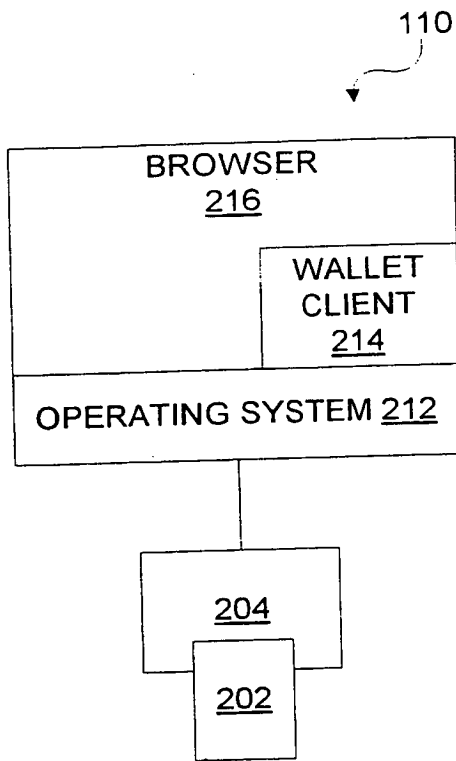


FIGURE 2

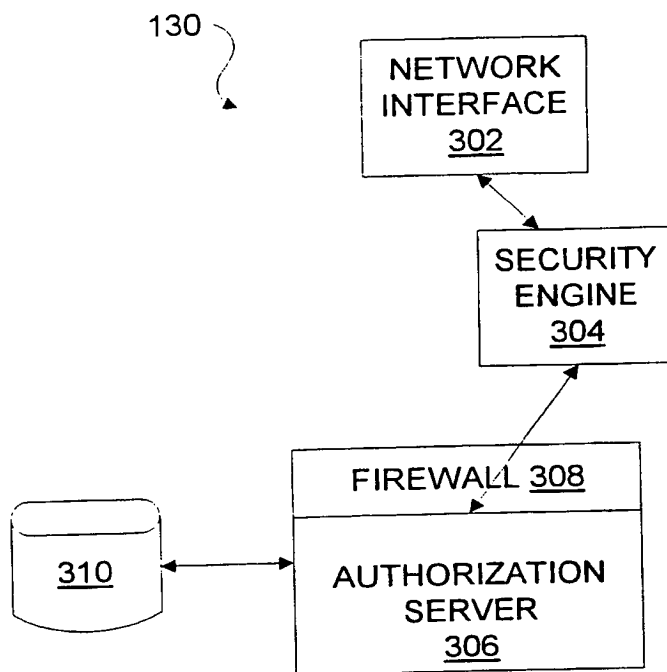


FIGURE 3

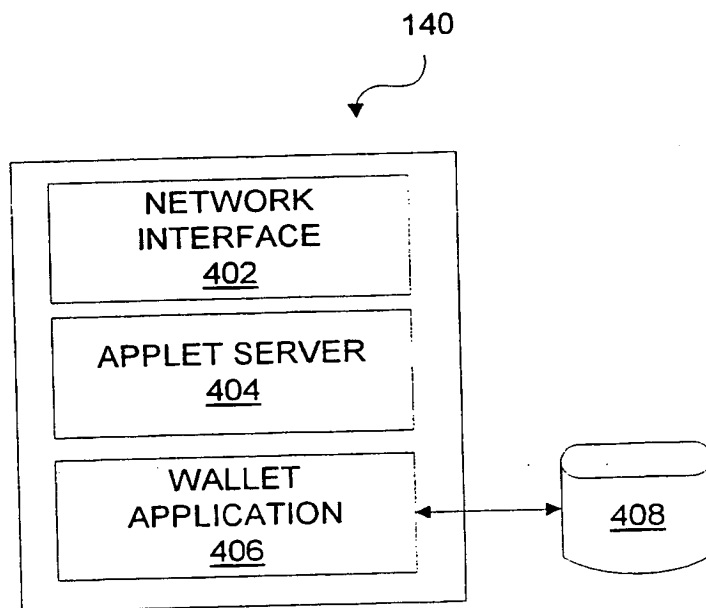


FIGURE 4

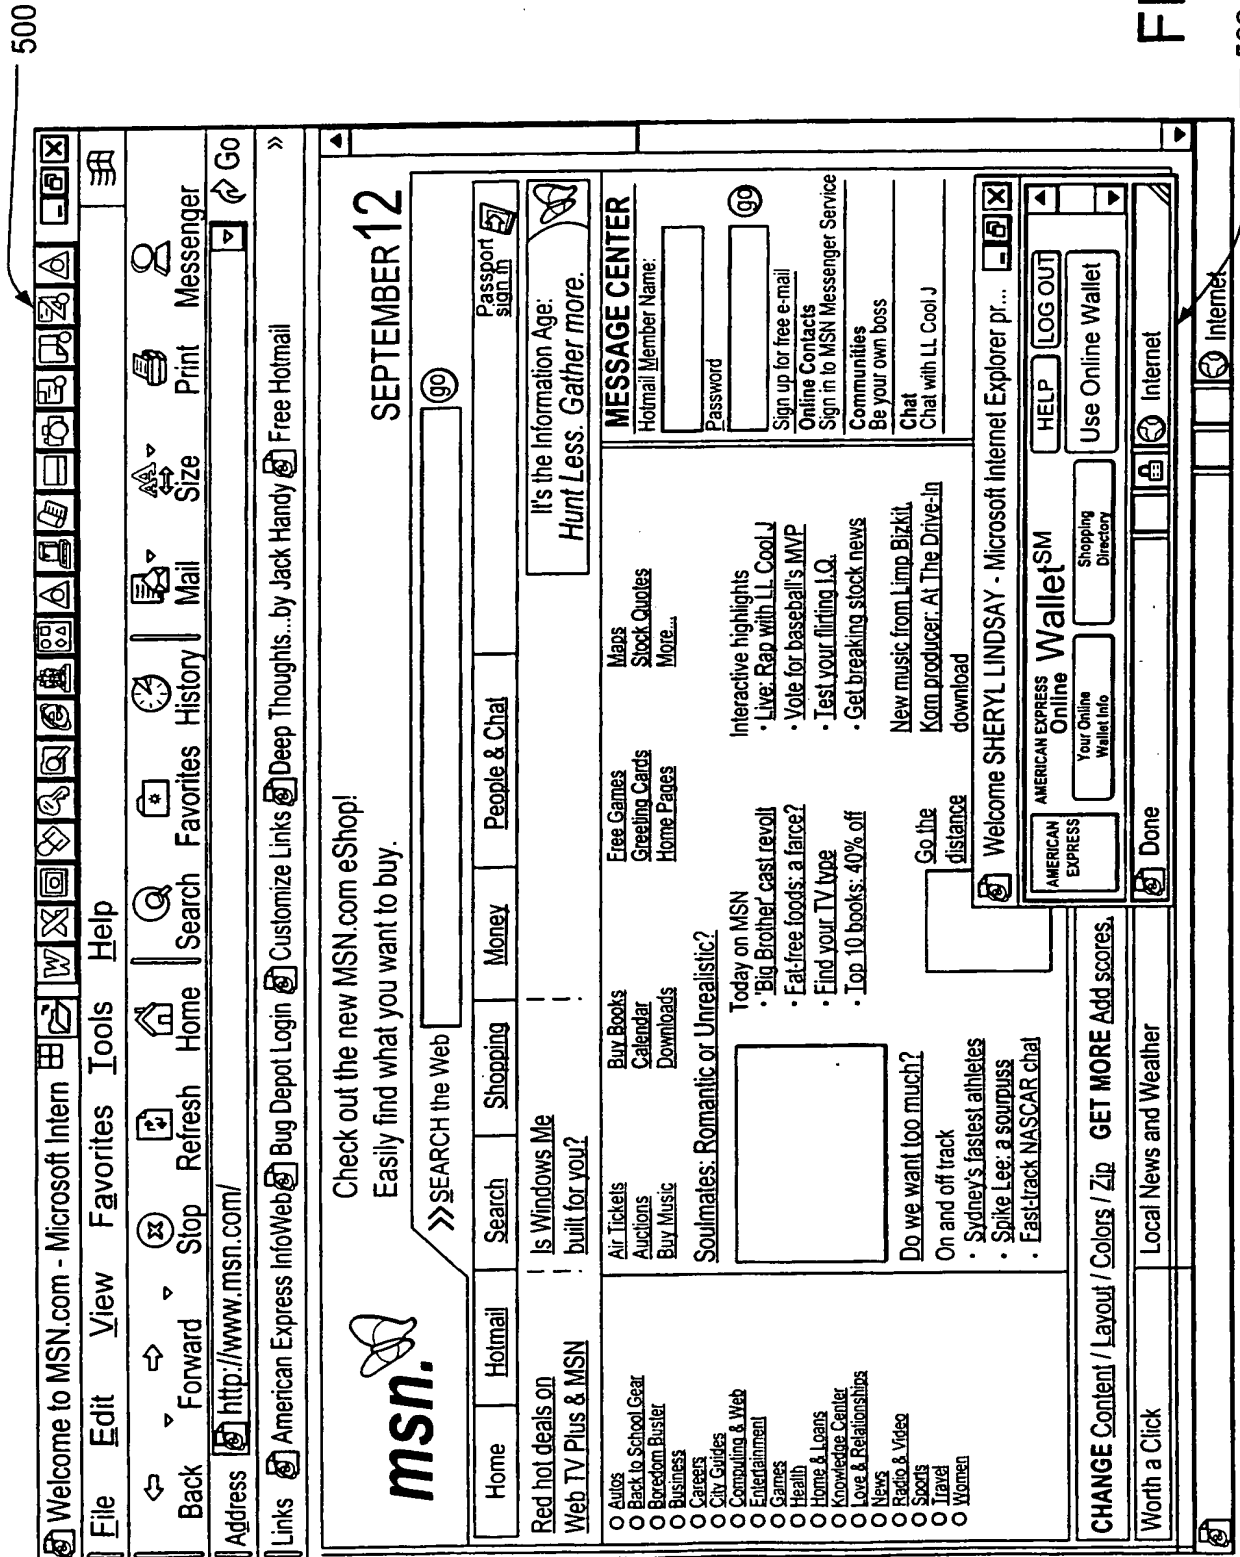
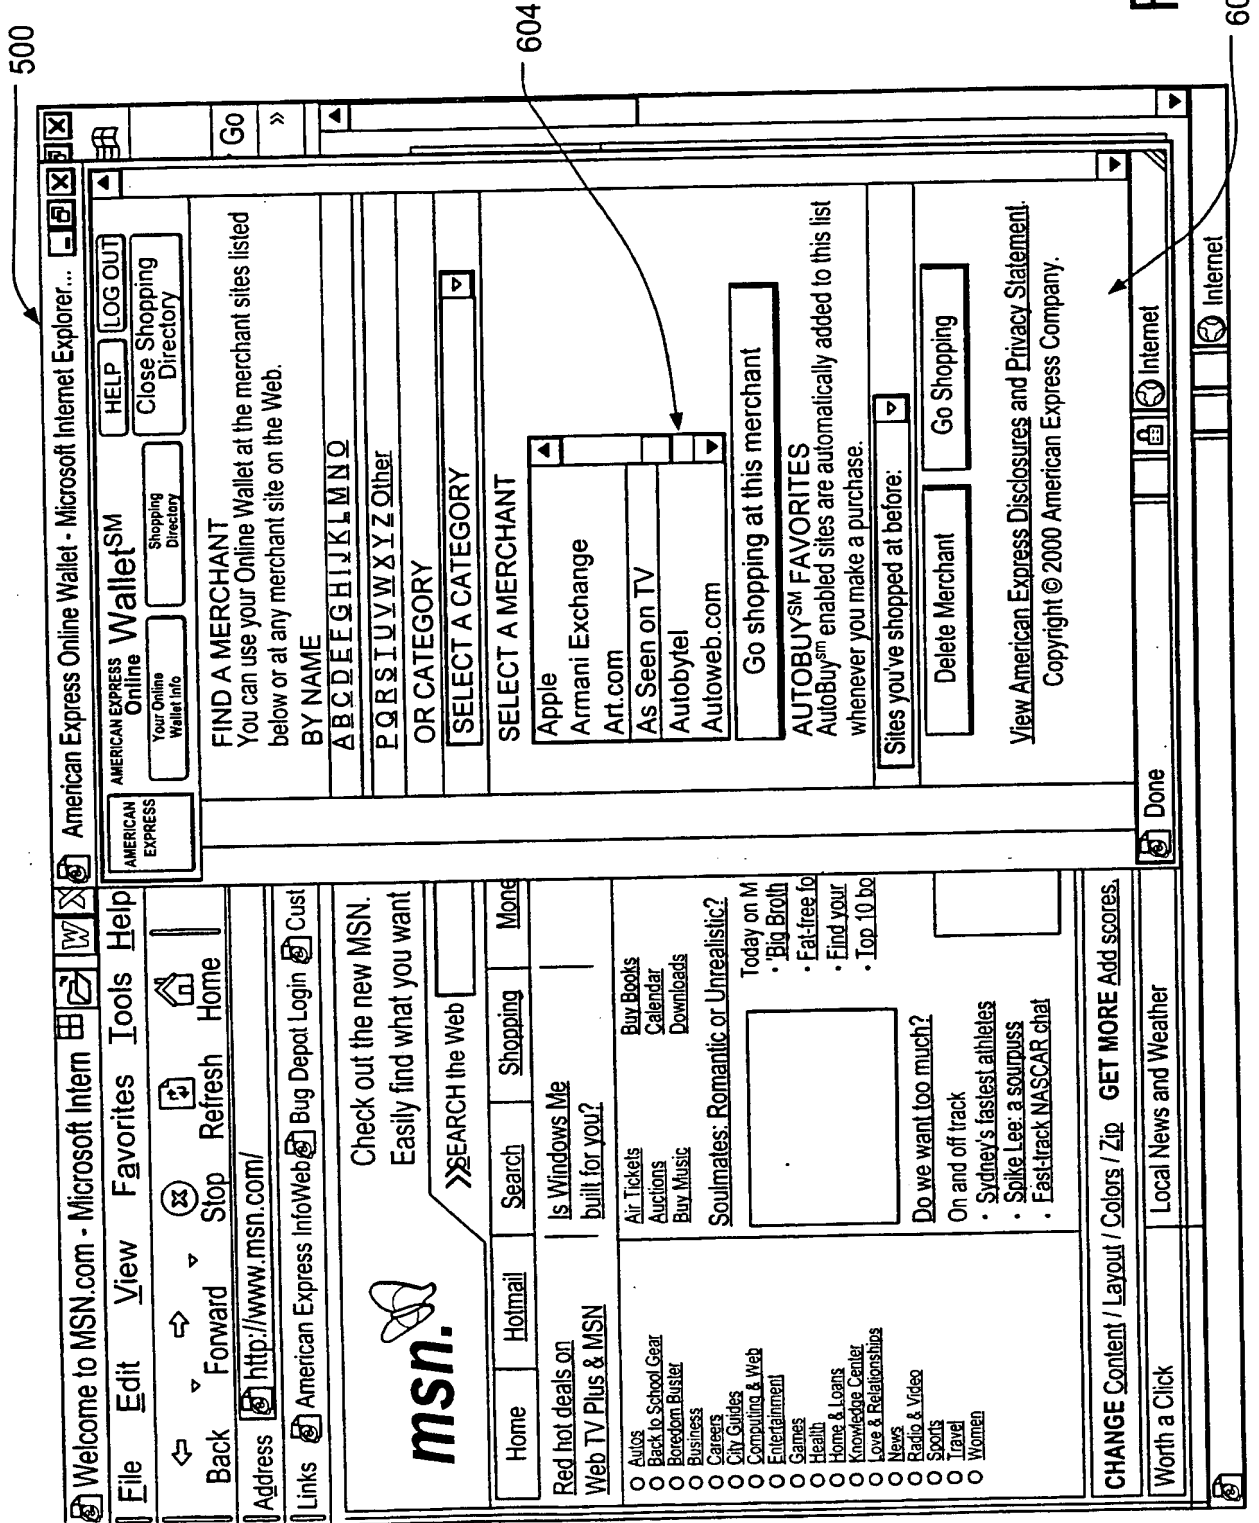


FIG. 6



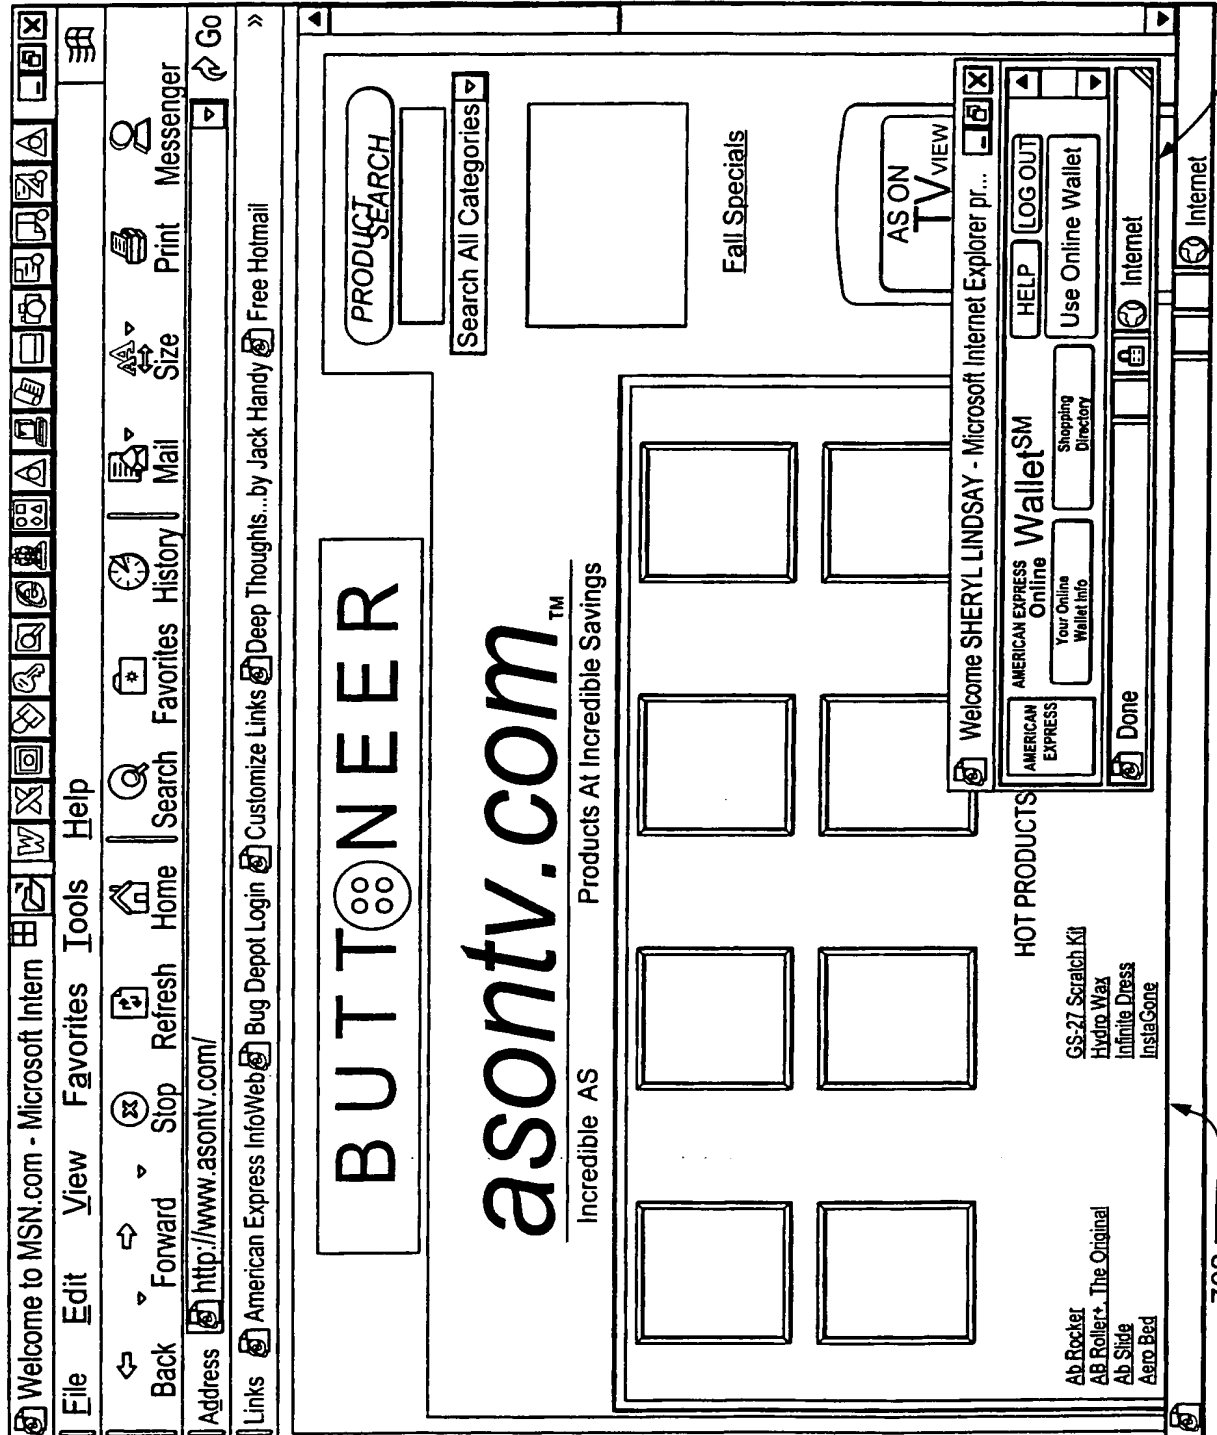


FIG. 7

502

702

As seen on TV - Order Form - Microsoft

File Edit View Favorites Tools Help

Back Forward Stop Refresh Home

Address <http://www.asontv.com/>

Links American Express InfoWeb Bug Depot Login Cust

ason
Incredible AS ON

This is the "As Seen On TV" order form. Please click the "Preview Order" button to see the detailed options to select the free gift (with purchases over \$50).

We do c

You may also order by calling (800) ENTE 0702.

1. Billing Information: (If you are paying with a credit card, your order can not be processed)

Name:

Address:

Apt./Suite#:

AMERICAN EXPRESS **AMERICAN EXPRESS Online WalletSM** **LOGOUT** **HELP** **Close Autobuy** **Shopping Directory** **Your Online Wallet Info**

CHECK OUT: Step 1 of 3

CHECK OUT **Go** **»**

Your Online Wallet is beginning the AutobuySM function, this will take you through a 3-step process.

Please make sure the information you've provided for As Seen on TV is correct. Then click "continue" to go to step 2.

Credit Card: **Blue from American Express**

Shipping Address: **HOME**

Billing Phone: **OFFICE**

Billing Email: **OFFICE**

Shipping Phone: **OFFICE**

Additional Shipping Information:
Domestic orders will be sent via UPS unless Next-Day Service is selected. Domestic orders for states or territories outside of the US continent are automatically sent via Next-Day Service.

I want Next-Day Service:

Done **Internet**

FIG. 8

802

702

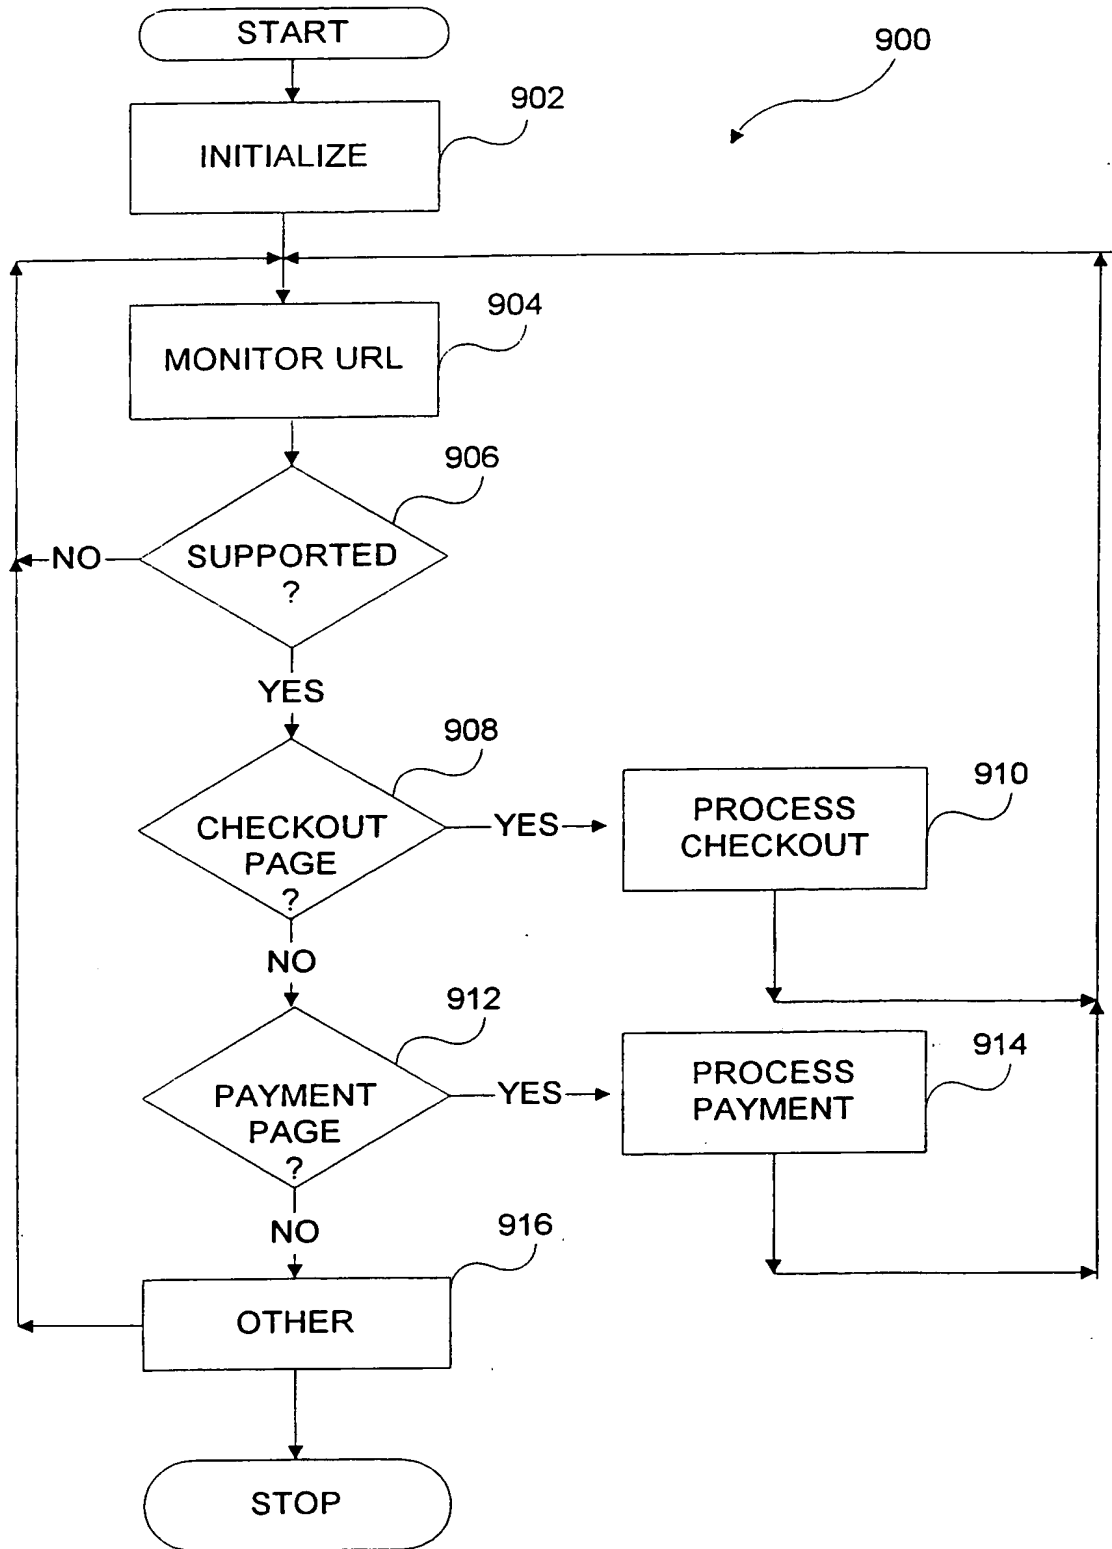


FIGURE 9

10 / 13

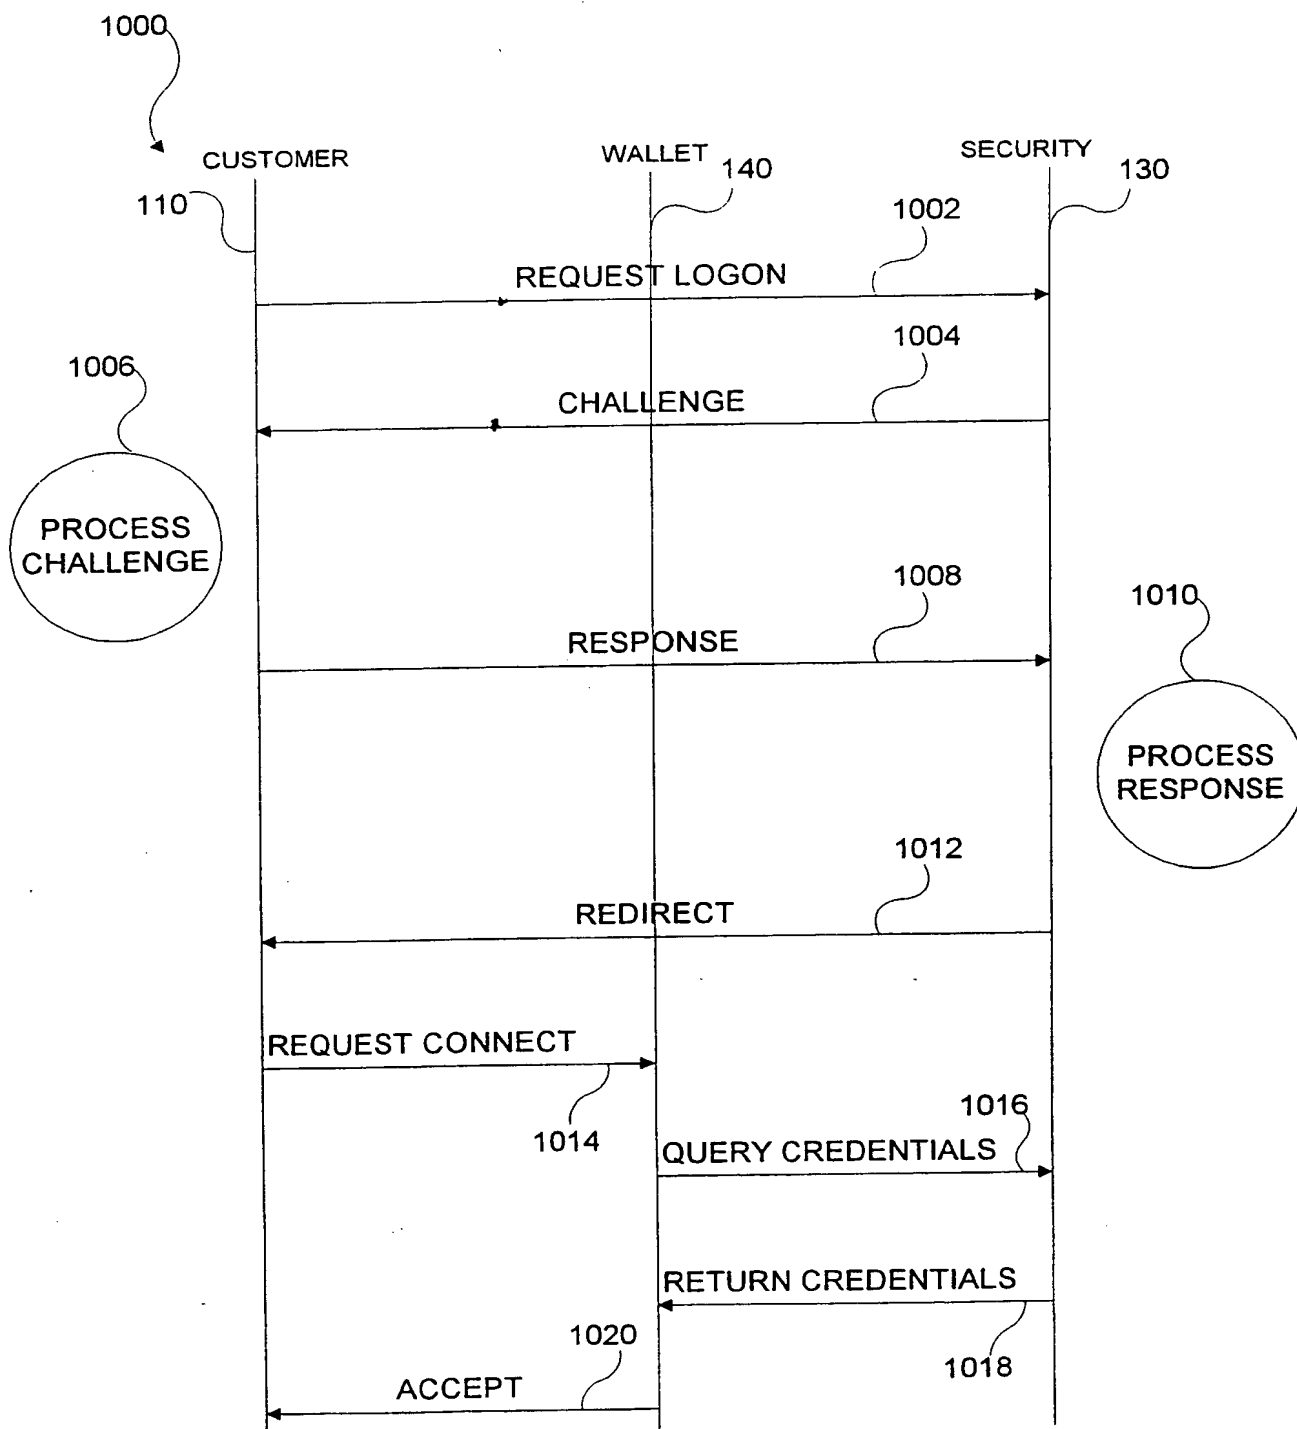


FIGURE 10

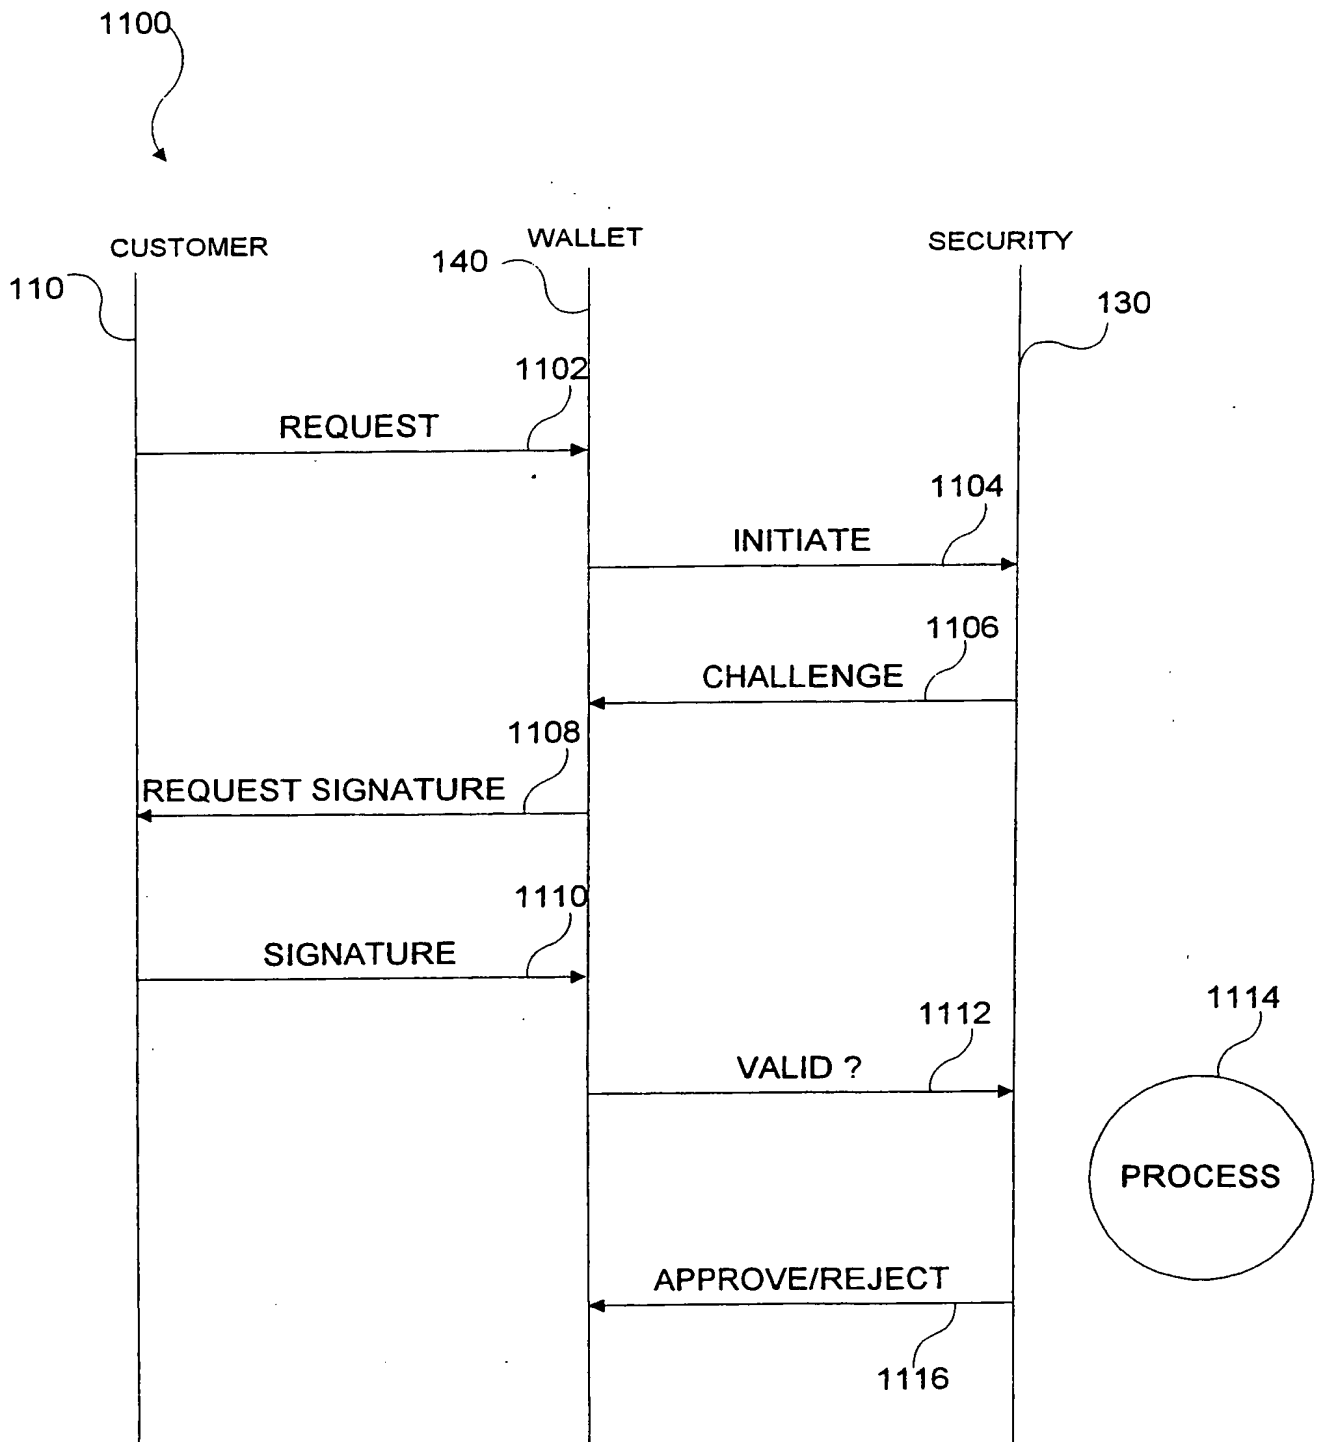


FIGURE 11

12 / 13

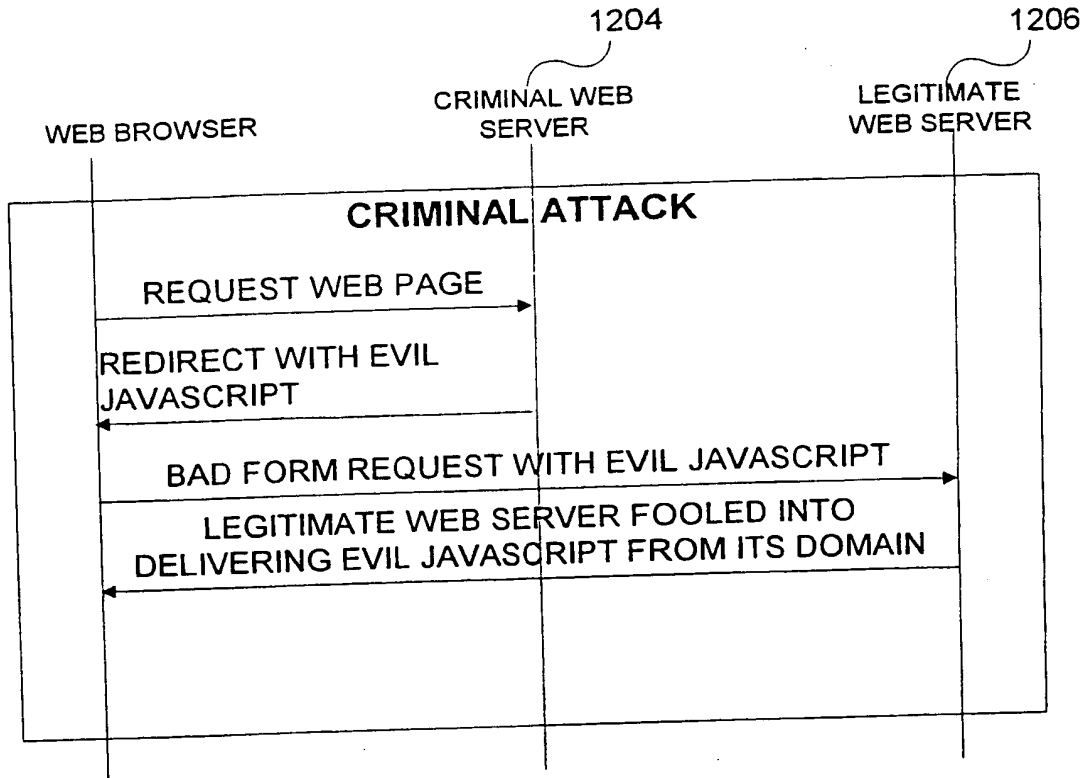


FIGURE 12A

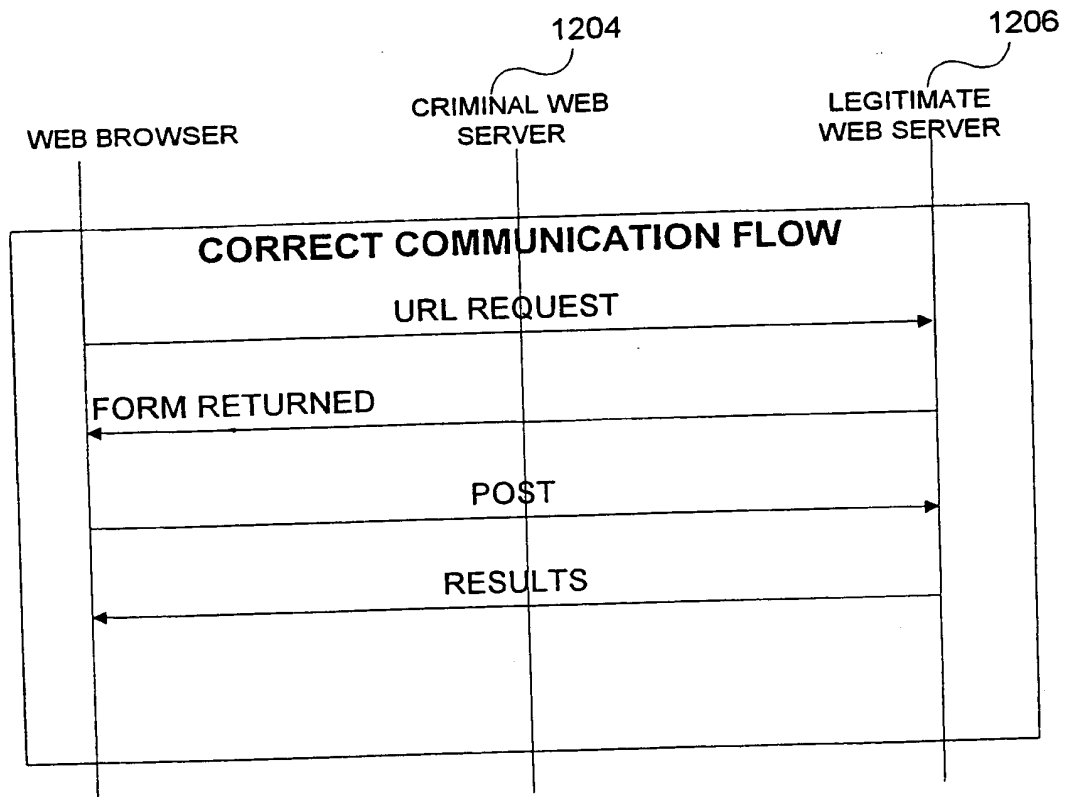


FIGURE 12B

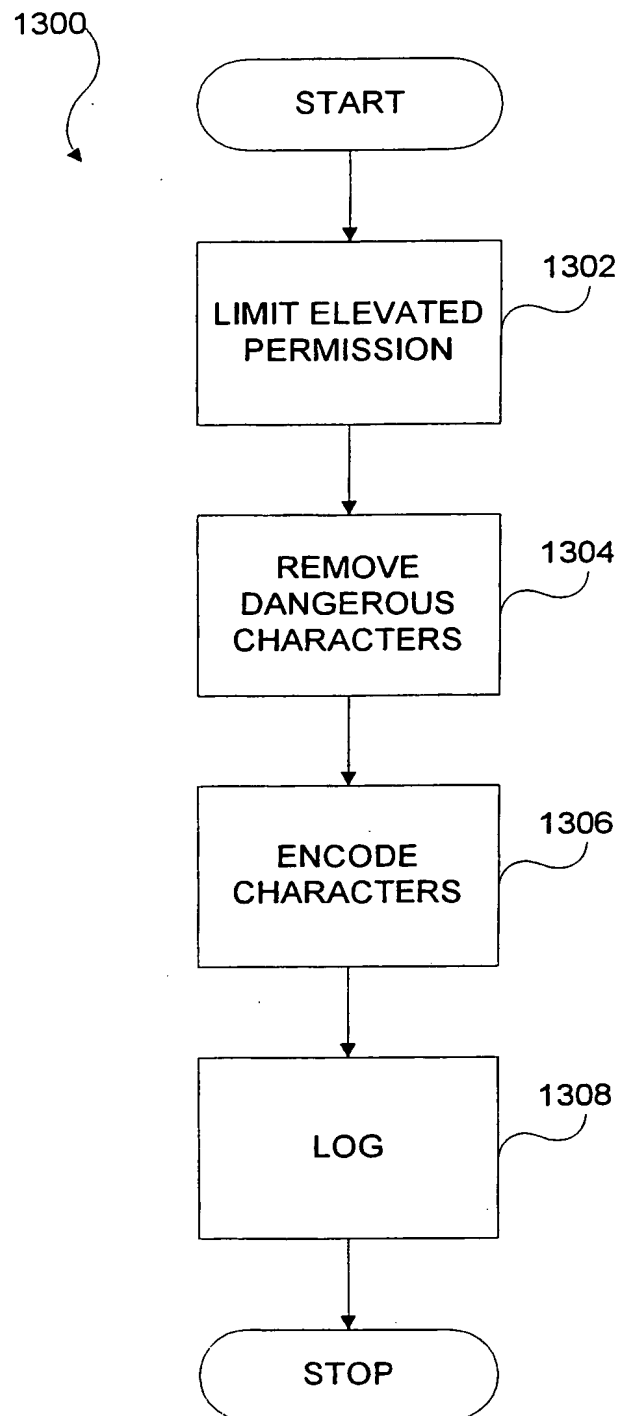


FIGURE 13



(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 March 2001 (08.03.2001)

PCT

(10) International Publication Number
WO 01/16900 A3

(51) International Patent Classification⁷: **G07F 7/10**,
G06F 1/00, G07F 7/08

(21) International Application Number: PCT/US00/23817

(22) International Filing Date: 30 August 2000 (30.08.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/151,880 31 August 1999 (31.08.1999) US
60/164,668 9 November 1999 (09.11.1999) US
60/165,577 15 November 1999 (15.11.1999) US
60/201,635 3 May 2000 (03.05.2000) US

(71) Applicant: **AMERICAN EXPRESS TRAVEL RELATED SERVICES COMPANY, INC.** [US/US];
American Express Tower, World Financial Center, New York City, NY 10285-4900 (US).

(72) Inventors: **BENNETT, Russell**; 10877 East Pear Tree Drive, Cornville, AZ 86325 (US). **BISHOP, Fred**; 2811


West Dynamite Boulevard, Phoenix, AZ 85085 (US). **GLAZER, Elliot**; 14107 Chiasso Terrace, Chesterfield, VA 23838 (US). **GORGOL, Zyg**; 10786 East Terra Drive, Scottsdale, AZ 85258 (US). **HOHLE, William, G.**; 10882 West Cedarfort Road (8570 North), Lehi, UT 84043 (US). **JOHNSTONE, David**; 28618 North 60th Place, Cave Creek, AZ 85331 (US). **LAKE, Walter, D.**; 719 West Rawhide Avenue, Gilbert, AZ 85233 (US). **SIMKIN, Marvin**; - (US). **SWIFT, Nick**; 38 Water Road, Reading, Greater London RG30 2NN (GB). **WHITE, Dirk**; 6638 West Via Montoya, Glendale, AZ 85310 (US). **JOHNSON, Michael**; 9154 North 97th Avenue, Peoria, AZ 85345 (US). **ROYER, Coby**; 7833 Stanford Avenue, University City, MO 63130 (US).

(74) Agent: **SOBELMAN, Howard, I.**; Snell & Wilmer L.L.P., One Arizona Center, 400 East Van Buren, Phoenix, AZ 85004-2202 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,

[Continued on next page]

(54) Title: METHODS AND APPARATUS FOR CONDUCTING ELECTRONIC TRANSACTIONS

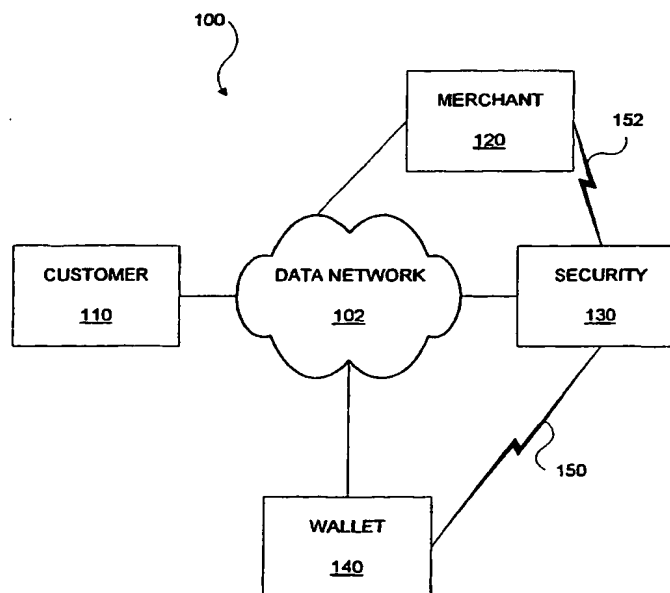

(57) Abstract: A system and method for conducting electronic commerce are disclosed. In various embodiments, the electronic transaction is a purchase transaction. A user (110) is provided with an intelligent token (202), such as a smartcard containing a digital certificate. The intelligent token suitably authenticates with a server on a network (130) that conducts all or portions of the transaction on behalf of the user. In various embodiments a wallet server (140) interacts with a security server (130) to provide enhanced reliability and confidence in the transaction. In various embodiments, the wallet server includes a toolbar (502). In various embodiments, the digital wallet pre-fills forms. Forms may be pre-filled using an auto-remember component.

WO 01/16900 A3



NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

Published:

— with international search report

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:
4 October 2001

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

Intern Application No

PCT/US 00/23817

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G07F7/10 G06F1/00 G07F7/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G07F G06F G06K H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 534 857 A (BOWCOCK MATTHEW P ET AL) 9 July 1996 (1996-07-09) abstract; figures 2,3 column 4, line 8 - line 25 ----	1,4,13, 19,22,23
A	WO 99 21321 A (CRYPTOWORKS) 29 April 1999 (1999-04-29) abstract; figure 1 page 13, line 26 -page 15, line 28 ----	1-3,13, 15
P,A	EP 1 017 030 A (IBM) 5 July 2000 (2000-07-05) abstract; figures 4-6 page 7, line 35 -page 8, line 19 ----- -/-	1-4,13, 15,22, 25,30

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

19 April 2001

Date of mailing of the international search report

08. 05. 2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Lindholm, A-M

INTERNATIONAL SEARCH REPORT

Intern. Application No

PCT/US 00/23817

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 43 39 460 C (SIEMENS AG) 6 April 1995 (1995-04-06) abstract; figure 1 column 1, line 36 - line 53 -----	1
X	US 5 832 212 A (CRAGUN BRIAN JOHN ET AL) 3 November 1998 (1998-11-03) abstract column 2, line 14 - line 49 column 3, line 54 -column 4, line 50 column 5, line 66 -column 6, line 10 -----	5-10
A	WO 98 21683 A (FINJAN SOFTWARE LTD) 22 May 1998 (1998-05-22) abstract page 3, line 4 - line 6 page 11, line 15 - line 22 -----	5
A	WO 98 45778 A (ZUTA MARC) 15 October 1998 (1998-10-15) abstract page 17, line 4 -page 19, line 11 -----	5
X	EP 0 917 120 A (CITICORP DEV CENTER INC) 19 May 1999 (1999-05-19) column 8, line 53 -column 10, line 9 -----	25-31
X	EP 0 927 945 A (AMAZON COM INC) 7 July 1999 (1999-07-07) abstract column 2, line 14 -column 3, line 9 -----	37-42

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 00/23817

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

As a result of the prior review under R. 40.2(e) PCT,
no additional fees are to be refunded.

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☒ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-4 13-24

Conducting transactions: After transaction request has been recieved at server. True identity of the smartcard owner is verified by challenge response (C+R). Credentials (session-, transaction-no.) comprising at least one key are assembled and provided to the user as well as a wallet server. Second request from user include part of credential. If this request is valid access to transaction is approved.

2. Claims: 5-12

Method to protect a network server by removing dangerous characters within the site an restricting access to portion of the server.

3.. Claims: 25-41

Digital wallet comprising activator, toolbar as well as server.

INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Application No

PCT/US 00/23817

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5534857 A	09-07-1996	AU 656245 B	27-01-1995
		WO 9310509 A	27-05-1993
		EP 0722596 A	24-07-1996
		FI 942177 A	11-05-1994
		NO 941774 A	11-05-1994
WO 9921321 A	29-04-1999	US 6026166 A	15-02-2000
		AU 1105599 A	10-05-1999
		EP 1033010 A	06-09-2000
EP 1017030 A	05-07-2000	JP 2000194770 A	14-07-2000
DE 4339460 C	06-04-1995	EP 0654919 A	24-05-1995
US 5832212 A	03-11-1998	CA 2251984 A	30-10-1997
		EP 0894305 A	03-02-1999
		WO 9740446 A	30-10-1997
WO 9821683 A	22-05-1998	EP 0965094 A	22-12-1999
		US 6167520 A	26-12-2000
		US 6092194 A	18-07-2000
		US 6154844 A	28-11-2000
WO 9845778 A	15-10-1998	AU 6850798 A	30-10-1998
EP 0917120 A	19-05-1999	AU 1584499 A	31-05-1999
		AU 1796599 A	31-05-1999
		AU 9234698 A	03-06-1999
		BR 9806416 A	16-11-1999
		CN 1233804 A	03-11-1999
		EP 0917119 A	19-05-1999
		EP 0950972 A	20-10-1999
		JP 11250165 A	17-09-1999
		JP 11232348 A	27-08-1999
		TW 381241 B	01-02-2000
		WO 9924891 A	20-05-1999
		WO 9924892 A	20-05-1999
		EP 0951158 A	20-10-1999
		EP 0950992 A	20-10-1999
		JP 2000036049 A	02-02-2000
		JP 2000076189 A	14-03-2000
		JP 2000251006 A	14-09-2000
EP 0927945 A	07-07-1999	US 5960411 A	28-09-1999
		AU 9477998 A	29-03-1999
		CA 2246933 A	12-03-1999
		CA 2263781 A	12-03-1999
		EP 0902381 A	17-03-1999
		JP 11161717 A	18-06-1999
		JP 2000099592 A	07-04-2000
		WO 9913424 A	18-03-1999

THIS PAGE BLANK (USPTO)